


A *Nidec* Group Company

**SERVO**

All for dreams

# Brushless DC Motors & Speed Control Drivers

FHD·FYD Series

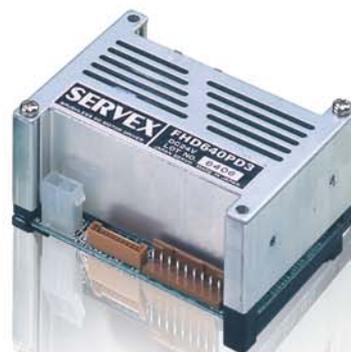

# BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

## FHD Series

### DC24V (20, 40W) DC48V (60W)

#### ■ Distinguishing Features

- Motors are designed small and high performance
  - We recently released a special magnetic circuit design motor. This motor design is smaller and has a higher performance than conventional FED, FYD series motors.
  - Flange size of this series is 61mm sq. (2.4 in sq.). However flange size of 40W & 60W types are 80mm sq. (3.1 in sq.)
- Compact design Driver
  - "Palm Mini R" Type is the smallest. (20W, 40W only)
  - "Palm Mini PLUS" Type is small. (20W, 40W only)
  - "J - Book" Type is (60W only)
  - High power type is a circuit-board and superconducting type. (20W, 40W)
- Wide Ranged Speed Control (60W only)
  - Wide range (200r/min-2500r/min 60W:65r/min-2500r/min), stepless speed control.
  - Very steady characteristics (Feed back control employed).
- Speed pulse output
  - Speed pulse output can be used for speed monitoring, simplified position control...
  - "Palm Mini R" Type: 42 pulse/revolution
  - "Palm Mini PLUS" Type: 42 pulse/revolution
  - "J - Book" Type: 42 pulse/revolution
  - "High power simple" Type: 7 pulse/revolution output is available for speed monitoring and simplified position control are possible.
- Direction of rotation signal output
  - Direction of rotation can be monitored by this signal.
- Alarming
  - At an over-load condition, the motor stops and an alarm signal is output.



#### ■ Model Code

Model on set

FHD 6 P 20 PF - D3  
 ① ② ③ ④ ⑤ ⑥

- Series name
- Motor flange dimensions  
6 : 61X61mm (2.4X2.4 in.)
- Driver type  
P: Palm mini PLUS type  
J: J - Book type
- Motor output  
20: 20W  
40: 40W  
60: 60W

- Motor output shaft type  
S : Plain shaft  
PF : Pinion shaft  
PE : Pinion shaft
- Power supply voltage  
D3: DC24V  
D5: DC48V

Model on motor

FH 6 PF 20 H - D3  
 ① ② ③ ④ ⑤ ⑥

- Series name
- Adapting motor flange dimensions  
6: 61X61mm (2.4X2.4 in.)
- Motor output shaft type  
S: Plain shaft  
PF: Pinion shaft  
PE: /

- Motor output  
20: 20W  
40: 40W
- Adapting Driver type  
H: High power simple type driver  
R: Palm mini R type driver
- Power supply voltage  
D3: DC24V

Model on driver

FHD 6 20 H D3  
 ① ② ③ ④ ⑤

- Series name
- Adapting motor flange dimensions  
6: 61X61mm (2.4X2.4 in.)
- Motor output  
20: 20W  
40: 40W

- Driver type  
H: High power simple type driver  
R: Palm mini R type driver  
(Holding torque can be generated)
- Power supply voltage  
D3: DC24V

**NEW**

# Palm mini R type




## ■Specification


Model on motor	Plain shaft type		FH6S20R-D3		FH6S40R-D3	
	Pinion shaft type		FH6PF20R-D3		FH6PE40R-D3	
Model on driver			FHD620RD3		FHD640RD3	
Rated voltage	V (DC)		24		24	
Rated output	W		20		40	
Speed control range	r/min		100~2500		100~2500	
Rated torque	mN · m		98		200	
	oz · in		14		28	
MAX. instantaneous torque (in 5sec.)	mN · m		150 (2000r/min MAX.)		290 (500r/min MAX.)	
	oz · in		21 (2000r/min MAX.)		42 (500r/min MAX.)	
Rated speed	r/min		2000		2000	
Speed setting method			① Speed setting by internal speed setter			
			② Speed setting by external speed setter (Sold separately : model code Q-R10KB)			
			③ Speed setting by external voltage supply 0~10V			
Speed setting	(r/min)/V		300±5%			
Speed variation			Against load	±1%	0~rated torque at rated voltage and speed	
			Against voltage	±1%	Rated voltage ±10% at rated speed, no load	
			Against temperature	±1%	20±20°C at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN, HT, INT H : Open collector L : GND (0~1.5V) ※HT: Rotor stop position maintenance			
		Output	ALARM OUT, SPEED OUT, F/R OUT Open collector output DC30V MAX. 2mA MAX.			
Speed pulse	Pulse/Revolution		42		42	
Current	Rated (Ave.)		1.8 MAX.		3.1 MAX.	
	MAX. (Peak)		9 MAX.		10 MAX.	
Acceleration time adjustment			0.5 to 10 seconds in the condition of rated speed, no load and no inertia The acceleration time is changed by the load and the inertia value.			
Rotor stop position maintenance			Rated torque x 0.5			
Protection functions			Overload protection, High & Low voltage protection, Overspeed protection function Overheat protection and Hall IC signal disconnection protection			
Others			Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) (Between case and coil by DC500V tester)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 100r/min	at 2000r/min	6H□EBN		8F□EBN	
			mN · m	oz · in	mN · m	oz · in
5	20	400	390	56	780	110
10	10	200	780	110	1600	220
25(25.44)	4	80	1700	240	3600	510
50(49.6)	2	40	3500	500	7000	990

- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.
- □ : rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in ( ) should be used as gear ratio.

## Torque Speed/Current (TYP.) Characteristics FH6S(PF)20R-D3+FHD620RD3

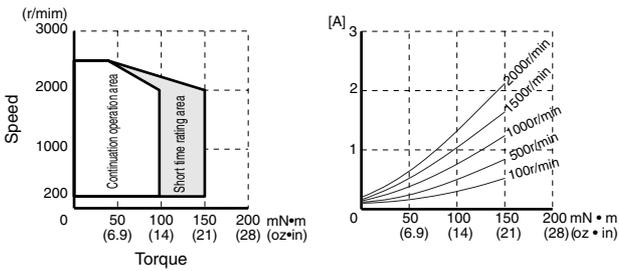


## FH6S(PE)40R-D3+FHD640RD3

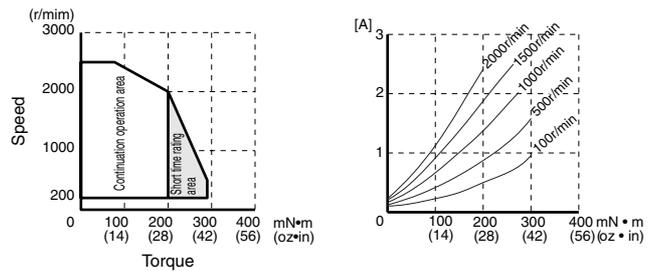

## Input & output terminals and wiring diagram


Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24V±10%
	2	Black	P.GND	-	Power supply GND for driver	
I/O	1	Brown	ALARM OUT	Output	H: Normal operation L: Alarm output	H: Open collector L: 0.6V MAX. Output DC30V MAX. & 2mA MAX
	2	Red	SPEED OUT	Output	42 Pulse /Revolution ※1	
	3	Orange	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	4	Yellow	F/R IN	Input	H: CCW L: CW order (Viewed from motor output shaft side)	H: Open collector L: 0~1.5V
	5	Green	BRAKE ※	Input	H: BRAKE Deactivated L: BRAKE activated It functions in RUN signal "L"	
	6	Blue	RUN	Input	H: Stop L: Start It functions in RUN signal "L"	
	7	Purple	HT	Input	H: Holding torque OFF L: Holding torque ON It functions in RUN signal "L"	
	8	Gray	INT	Input	H: The motor is controlled by the speed voltage from the inside command. L: The motor is controlled by the speed voltage from the External command.	
	9	White	GND	-	GND for I/O signals	
	10	Black	VR	Output	Power supply positive for external speed setting	
11	Brown	VS	Input	Speed setting signal positive	0~10V	
12	Red	GND	-	Speed setting signal GND		

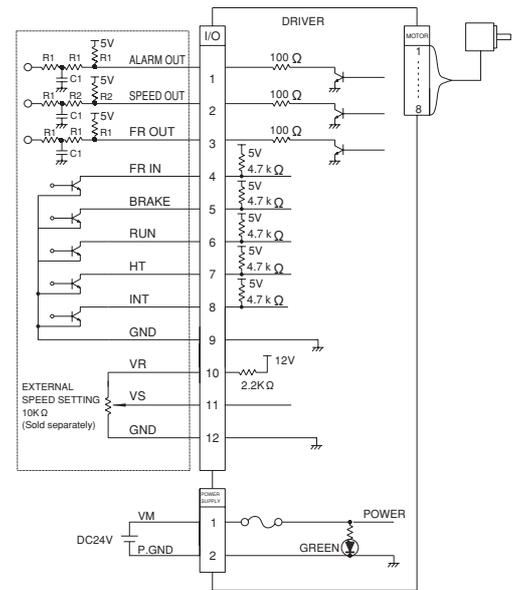

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

- ※1 The speed output signal is as follows.
- ※2 • Reverse rotation brake and short circuit brake
  - "BRAKE has priority over "RUN".
  - During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.

※1 "SPEED OUT" signal is shown below

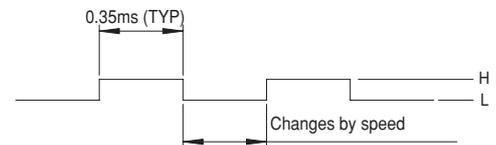

## Protection


Protection function	Protection		Alarm Release
	Description	Operation	
Overload Protection function	Activated when the load exceeds the rated torque for more than 5 seconds. Disconnection protection in hall IC	The driver will cause the motor to stop and "ALARM" will output "L".	Alarm is released when Run-signal was inputted 2 times or shut-down the supply voltage more than 1 minute period.
Disconnection-protection in hall IC	The protection operates when the abnormal feed-back signal appeared from the motor.	The LED will blink for the corresponding number of times shown right chart.	(When release the protection, two times Run-signal input shall be done within one sec.)
High & Low voltage-protection	Activated when the power supply voltage exceeds about 27.6 VDC or drops below about 18 VDC for more than 1 second.		
Acceleration protection	Activated when the actual motor speed exceeds 15% higher than the specified speed for more than 1 second.		
Overspeed protection	Activated when the temperature of PCB surface inside of the driver exceeds about 85 °C.		

Protection name	LED Blinking
Overload Protection	1 time
Disconnection protection of Hall IC signal	2 times
High & Low voltage-protection	3 times
Acceleration protection	4 times
Overspeed protection	5 times

The confirmation of load is more than or less than rated load, it is not checked by using over-load protection operation and less than rated load operation shall be prepared.

Note. The above LED blinking are repeated by the each two seconds period.

## Control sequence

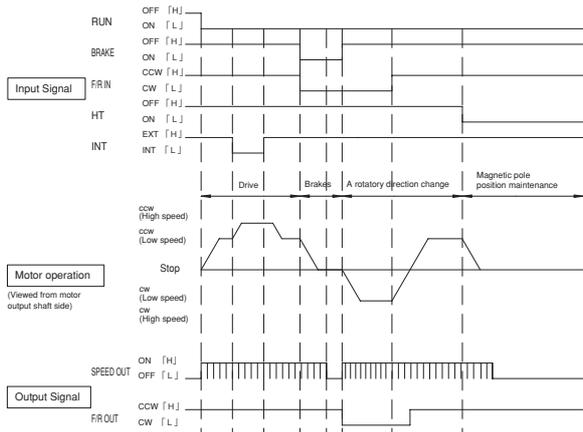

The INT signal is the signal that switches internal speed specified voltage and external speed specified voltage. In this control sequence, the voltages are set up as internal speed voltage for low speed and external speed voltage for high speed operation.

[Notes for BRAKE Operation & Rotation change]

(1) When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H-"L") must not be made.

(2) During the brake is operating, set the "RUN" signal at "L" all the time.

WARNING:

In case of different way of use from (1) and (2), (2) may be the cause of the incorrect operation and (1) may be the cause of the fire or the breakdown.

Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed, the reverse rotation brake is applied first, then the short circuit brake is applied. But at slower speed, only the short circuit brake will be applied.)

For repeated the "F/R IN" and/or the "BRAKE" inputs, maintain at least a 3 second interval.

While the motor is in stop, the "F/R OUT" is held at the same signal as previously output.

This means; if the motor stopped once, but the rotation reversed by cogging torque or by the Load, then the "F/R OUT" is held at reversed signal.

## Speed setting

Fig.1 Speed setting by external speed setter



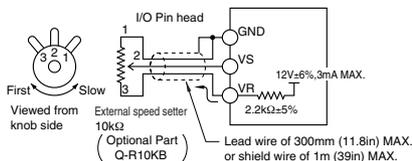



Fig.2 Speed setting by external voltage supply




Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as an external speed setter.
Speed of internal speed setting device	The speed setting is done by VR2 of Fig.3 But I/O 8pins INT signal is defined as "H".
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.


Fig3 Driver external from and internal organs LED and a trimmer

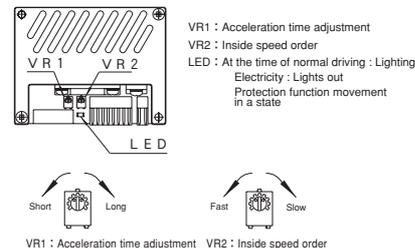

## Driver outline Unit: mm (inch)

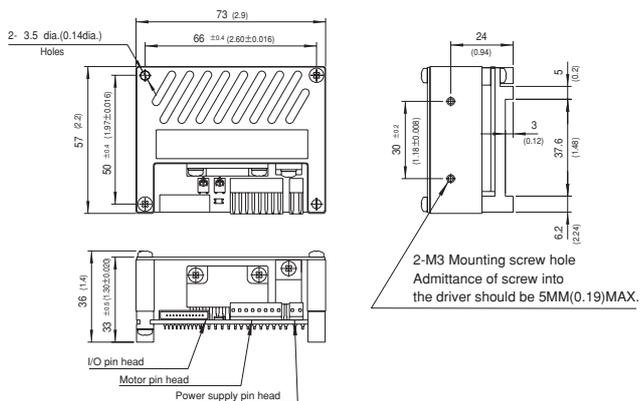


## Accessory Unit: mm (inch)

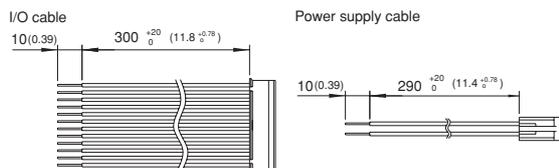

## Connector model code

Item	Pin head model code on drive	Connector model code on cable		Maker
		Housing	Contact (chained)	
I/O connection	171826-08	171822-8	170262-1	AMP
Power supply connection	171826-02	171822-2	170262-1	JST
Motor connection	512B-ZR-5M4A	ZHR-12	SZH-002T-P0.5	

■Motor outlines (Plain shaft type) Unit: mm (inch)

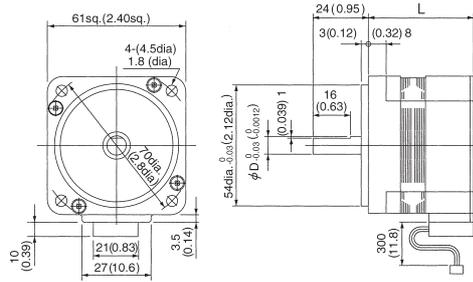


	Model	L	Weight	
			Kg	(lb)
①	FH6S20R-D3	46 (18.1)	0.5	1.1
②	FH6S40R-D3	60 (2.36)	0.7	1.5

Motor connector	① ②	Lead wire color	Item	Remark
	1	Purple	HU	Open collector
	2	Blue	HV	Open collector
	3	Green	HW	Open collector
	4	White	12V	
	5	Gray	GND	
	6	Orange	Coil W	
	7	Red	Coil V	
	8	Brown	Coil U	

■Motor (Pinion shaft type) + Gear head outlines


FH6PF20R-D3+6H □ EBN

Unit: mm (inch)

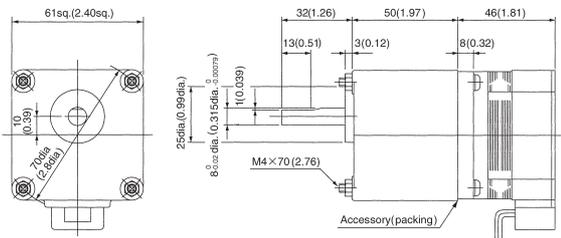


Gearhead weight 0.5Kg (1.1Lb)  
Bolts (accessory) M4x70 (2.76)

FH6PE40R-D3+8F □ EBN

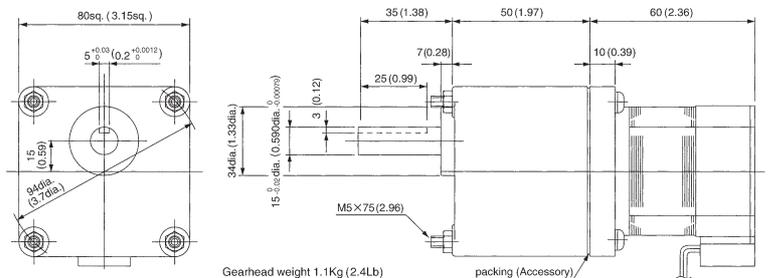

Gearhead weight 1.1Kg (2.4Lb)  
Bolts (accessory) M5x75 (2.96)  
Key (accessory)




■Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

		Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code
FHD series	Palm mini R type	FH6S20R-D3	FHD620RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6PF20R-D3	FHD620RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6S40R-D3	FHD640RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)
		FH6PE40R-D3	FHD640RD3	FHD-CNTL03 300 (11.8)	FHD-CNEL02-03 200 (7.9)	FHD-CNRL03 300 (11.8)
				FHD-CNTL05 500 (19.7)	FHD-CNEL07-03 700 (27.6)	FHD-CNRL05 500 (19.7)
				FHD-CNTL10 1000 (39.4)		FHD-CNRL10 1000 (39.4)

※ The power supply cable types for FHD series are the same as those for FED series.  
The I/O cable types for FHD series are the same as those for FYD series.

# Palm mini PLUS type J-Book type

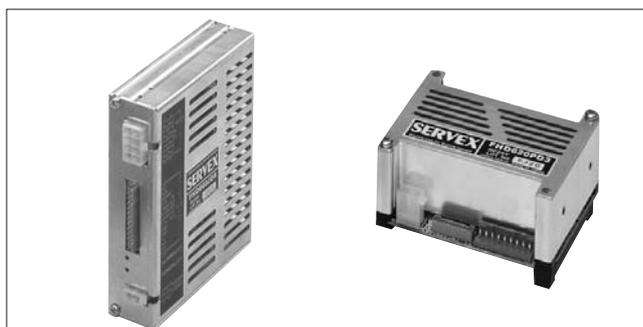


## ■Specification

Model on set		Plain shaft type	FHD6P20S-D3	FHD6P40S-D3	FHD6J60S-D5			
		Pinion shaft type	FHD6P20PF-D3	FHD6P40PE-D3	FHD6J60PE-D5			
Rated voltage	V (DC)		24	24	48			
Rated output	W		20	40	60			
Speed control range	r/min		200~2500	200~2500	65~2500			
Rated torque	mN · m		98	200	290			
	oz · in		14	28	42			
MAX. instantaneous torque (in 5sec.)	mN · m		150 (2000r/min MAX.)	290 (500r/min MAX.)	440 (1500r/min MAX.)			
	oz · in		21 (2000r/min MAX.)	42 (500r/min MAX.)	62 (1500r/min MAX.)			
Rated speed	r/min		2000	2000	2000			
Speed setting method		①Speed setting by external speed setter (Sold separately: model code Q-R10KB) ②Speed setting by external voltage supply 0~10V						
Speed setting	(r/min)/V	300±5%						
Speed variation	Against load	±1%	0~rated torque at rated voltage and speed					
	Against voltage	±1%	Rated voltage ±10% at rated speed, no load					
	Against temperature	±3%	20±20°C at rated voltage and speed, no load					
Input and output signal	Input	RUN, BRAKE, F/R IN, ALARM RST (Only 60W) H: Open collector L: GND (0~0.8V)						
	Output	ALARM, SPEED OUT (PULSE OUTPUT), F/R OUT Open collector output DC30V MAX. 10mA MAX.						
Speed pulse	Pulse/Revolution		42	42	42			
Current	Rated (Ave.)	A	1.8 MAX.	3.1 MAX.	2.3 MAX.			
	MAX. (Peak)		9 MAX.	10 MAX.	10 MAX.			
Protection functions		Over load protection When an exceeding torque than rated is applied to motor for more than about 5 sec., Stop motor and outputs "L" from "ALARM" (20W, 40W) or "ALARM OUT" (60W). To release alarm : Palm Mini PLUS type: Disconnect power supply for more than 1min J-Book type: Input "L" to "ALARM RST" for more than 1sec. Do not measure/ judge by this operation whether the motor is overloaded or not.						
Others		Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) 100MΩMIN. (60W) (Between case and coil by DC500V tester)						
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads					
	at 200r/min	at 2000r/min	6H□EBN		8F□EBN			
			mN · m	oz · in	mN · m	oz · in	mN · m	oz · in
5	40	400	390	56	780	110	1200	170
10	20	200	780	110	1600	220	2400	330
25(25.44)	8	80	1700	250	3600	510	5500	780
50(49.6)	4	40	3500	500	7000	1000	10600	1500


- □: rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in ( ) should be used as gear ratio.

## Torque Speed/Current (TYP.) Characteristics


### FHD6P20S(PF)-D3

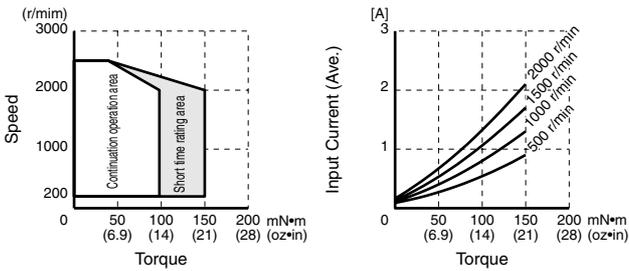

### FHD6P40S(PE)-D3

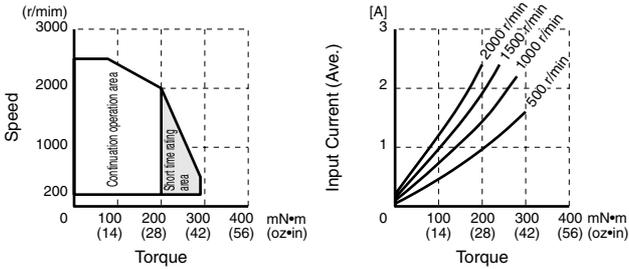


### FHD6J60S(PE)-D5

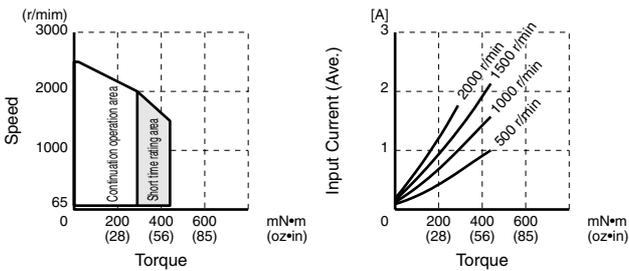

## Motor outlines (Plain shaft type)

Unit: mm (inch)

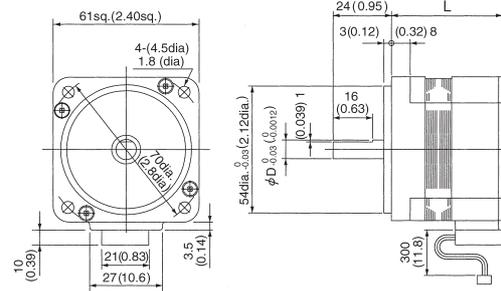

	Model	L	D:dia	Weight	
				Kg	(lb)
①	FHD6P20S-D3	46 (18.1)	8 (0.3150)	0.5	1.1
②	FHD6P40S-D3	60 (2.36)	8 (0.3150)	0.7	1.5
③	FHD6J60S-D5	60 (2.36)	10 (0.3937)	0.7	1.5


### Connection guide

	Symbol	20 / 40W		60W		Remark
		① PIN #	② Lead wire color	③ PIN #	④ Lead wire color	
Motor connector	Coil U	1	Brown	3	Brown	
	Coil V	2	Red	4	Red	
	Coil W	3	Orange	8	Orange	
	-	4	-	-	-	
	HW	5	Green	7	Green	Open collector
	HV	6	Blue	6	Blue	Open collector
	HU	7	Purple	5	Purple	Open collector
	GND	8	Gray	1	Gray	
	12V	9	White	2	White	

## Motor (Pinion shaft type) + Gear head outlines


### FHD6P20PF-D3+6H□EBN

Unit: mm (inch)

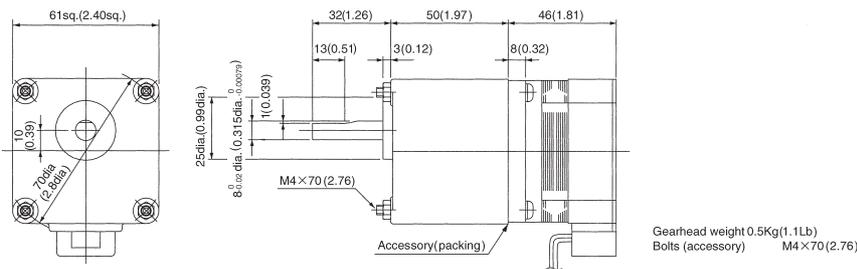

### FHD6P40PE-D3+8F□EBN

### FHD6J60PE-D5+8F□EBN

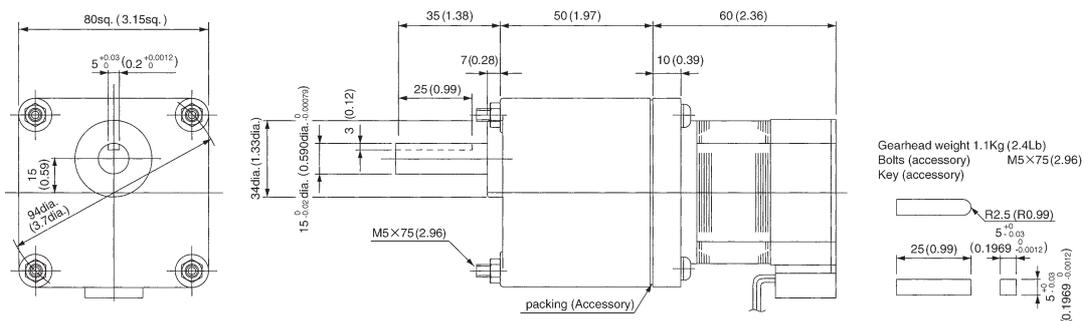


## Input & output terminals and wiring diagram


### FHD6P20S(PF)-D3

### FHD6P40S(PE)-D3

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC24V±10%
	2	P.GND	-	Power supply GND for driver	
I/O	1	SPEED OUT	Output	42 Pulse/Revolution *3	*1 H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	3	VR	Output	Power supply positive for external speed setter	0~10V
	4	VS	Input	Speed setting signal positive	
	5	GND	-	Speed setting signal GND	
	6	GND	-	GND for I/O Signal	Same as *1
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	
	8	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	
	9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V During the operation of "BRAKE", "RUN" signal be "L".
10	RUN	Input	H: Stop L: Start	Same as *2	

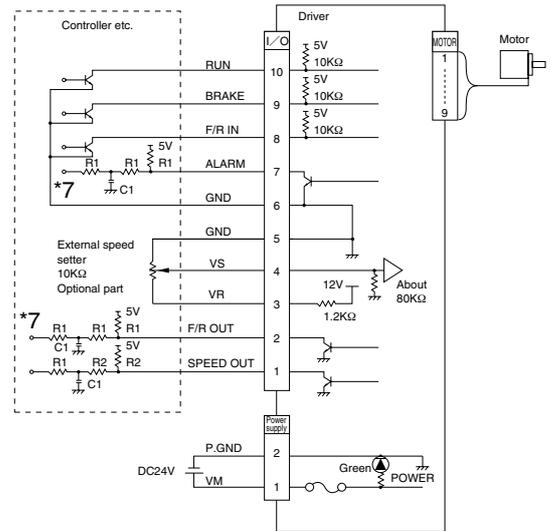


\*3 "SPEED OUT" signal is shown below.



### FHD6J60S(PE)-D5


Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC48V±10%
	2	P.GND	-	Power supply GND for driver	
I/O	1	NC	-		*4 H: Open L: 0~0.8V
	2	RUN	Input	H: Stop L: Start	
	3	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	
	4	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	
	5	SPEED OUT	Output	42 [Pulse/Revolution] *6	Same as *5
	6	ALARM RST	Input	H: Normal operation L: Reset	Same as *4
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	*5 H: Open collector DC30V MAX. L: 0~0.8V, 10mA MAX.
	8	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	9	GND	-	GND for I/O Signal	0~10V
	10	GND	-	Speed Setting Signal GND	
	11	VS	Input	Speed Setting Signal Positive	
	12	NC	-	Not Connected	
	13	VR	Output	Power Supply Positive for External Speed Setter	

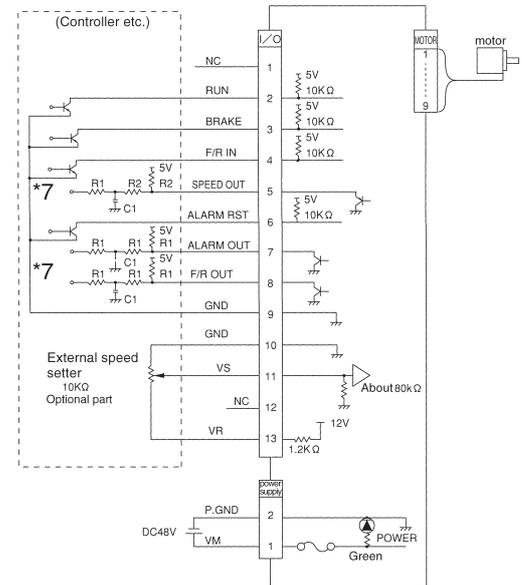

\*8

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

\*6 "SPEED OUT" signal is shown below.



note

- When input signal is H, input signals (RUN, BRAKE, F/R IN, and ALARM RST (60 W Only)) should be input by open collector. If you input 5 V, it will cause the operation to malfunction.
- Noise of output signals ("ALARM" (20W, 40W) "ALARM OUT" (60W)), "F/R OUT", "SPEED OUT") should be removed by a filter as shown in figure above. (\*7) Setting of filter constant should be done by confirming the noise level referring to the recommended constant. (\*8) The signal delays if the resistance and/or capacitor is large. However, this is a good way to control the noise. Especially for speed out, setting should be done with attention to filter constant because pulse width is narrow.

## Speed setting

Fig.1 Speed setting by external speed setter



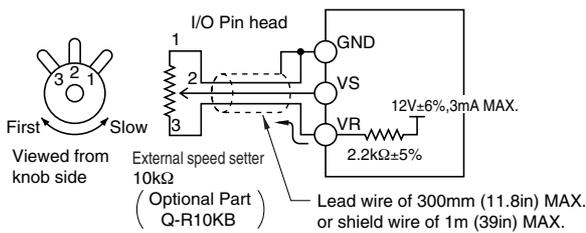


Fig.2 Speed setting by external voltage supply

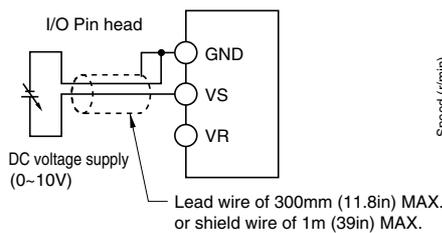

I/O Pin head Pin No.


	FHD6P20S (PF)-D3 FHD6P40S (PE)-D3	FHD6J60S(PE)-D5
GND	5	10
VS	4	11
VR	3	13

Should be used within specified speed control range, although the speed could be set at out of the speed range.

Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as an external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

## Control sequence

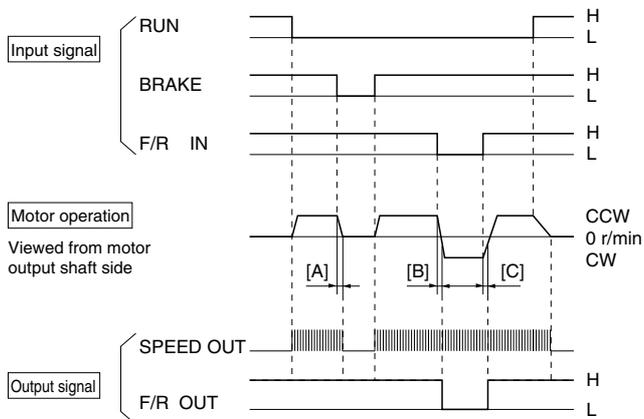

[Notes for BRAKE Operation & Rotation change]

- Do not change (period [A] left) the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.
- During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same.
- When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H"→"L") must not be made.
- During the brake is operating, set the "RUN" signal at "L" all the time.

WARNING:

In case of different way of use from (1), (2), (3) and (4), (1), (2), and (4) may be the cause of the incorrect operation and (3) may be the cause of the fire or the breakdown.


Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)

[Notes on "F/R OUT"] (20,40W only)

During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0-5pulses of "SPEED OUT" from the motor rotation switched.

## FHD6J60S(PE)-D5

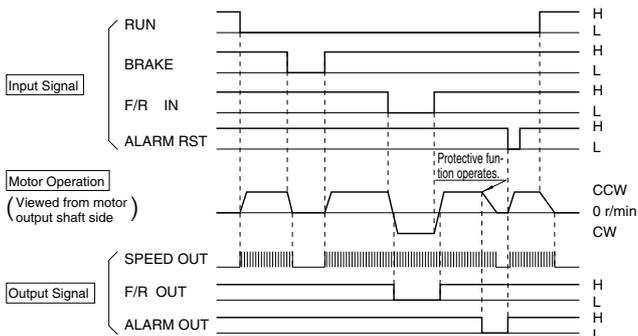


[Notes for "F/R OUT"] (60W only)

In case that motor is not running, "F/R OUT" holds the signal which has been output until motor stops. But according to the condition of use, there may be a case that motor runs reversely by cogging torque, load etc. After it stops. Be careful that in such case "F/R OUT" reverses and holds that condition.


[Notes for "ALARM RST"] (60W only)

Operation should be done by "H". If operated by "L", overload protective function will not work.

**Driver outline Unit: mm (inch)**  
**FHD6P20S(PF)-D3**  
**FHD6P40S(PE)-D3**

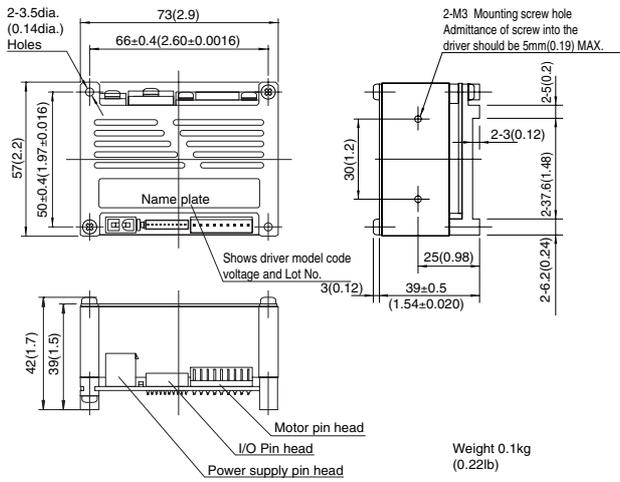



**Accessory Unit: mm (inch)**

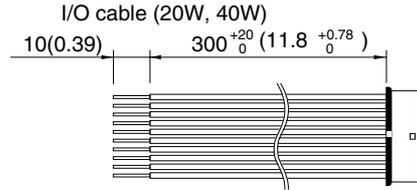

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	SPEED OUT	Brown	UL3265 AWG28
2	F/R OUT	Red	
3	VR	Orange	
4	VS	Yellow	
5	GND	Green	
6	GND	Blue	
7	ALARM	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	


**FHD6J60S(PE)-D5**

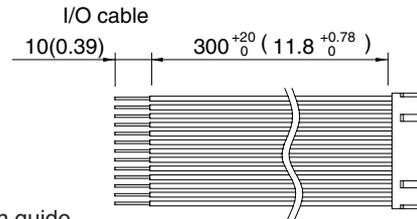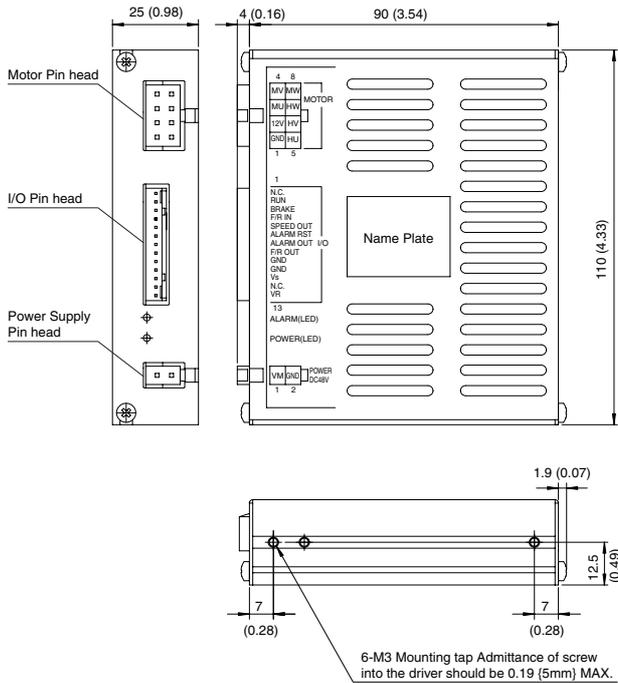

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	NC	Brown	UL1007 AWG26
2	RUN	Red	
3	BRAKE	Orange	
4	F/R IN	Yellow	
5	SPEED OUT	Green	
6	ALARM RST	Blue	
7	ALARM OUT	Purple	
8	F/R OUT	Gray	
9	GND	White	
10	GND	Black	
11	VS	Brown	
12	NC	Red	
13	VR	Orange	

Power supply cable (20W, 40W, 60W)



Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430
2	P. GND	Black	AWG22

**Connector model code**

Output	Item	Pin head model code on drive	Connector model code on cable		Maker
			Housing	Contact (chained)	
20W 40W	I/O connection	IL-Y-10P-S15T2-EF	IL-Y-10S-S15C3	IL-Y-C3-A-10000	JAE
	Power supply connection	5566-02A	5557-02R	5556T	MOLEX
	Motor connection	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC10000	JAE
60W	I/O connection	IL-G-13P-S3L2-SA	IL-G-13S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Power supply connection	5569-02A1	5557-02R	5556T	MOLEX
	Motor connection	5569-08A1	5557-08R	5556T	MOLEX

## ■Protection

Protection function	Protection		Alarm Release
	Setting	Operation	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stepped and "ALARM" outputs "L"	Cool down the driver fully, and input "L" into "ALARM RST" until "ALARM OUT" changes to "H". Or disconnect power supply for more than 1 minute.


Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.

## ■Motor/Driver/Cable/ model code table Unit: mm (inch)

		Motor driver set model code	Motor model code	Driver model code	Power supply cable model code	I/O Cable model code
<b>FHD series</b>	<b>Palm mini PLUS / J-Book driver</b>	FHD6P20S-D3	FH6S20-D3	FHD620PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P20PF-D3	FH6PF20N-D3	FHD620PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P40S-D3	FH6S40-D3	FHD640PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6P40PE-D3	FH6PE40N-D3	FHD640PD3	FED-CNSL03 300 (11.8)	FED-CNPL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNPL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNPL10 1000 (39.4)
		FHD6J60S-D5	FH6S60J-D5	FHD660JD5	FED-CNSL03 300 (11.8)	FED-CNIL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNIL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNIL10 1000 (39.4)
		FHD6J60PE-D5	FH6PE60J-D5	FHD660JD5	FED-CNSL03 300 (11.8)	FED-CNIL03 300 (11.8)
					FED-CNSL05 500 (19.7)	FED-CNIL05 500 (19.7)
					FED-CNSL10 1000 (39.4)	FED-CNIL10 1000 (39.4)

NOTE) Cable types for FHD series are the same as FED series, because they are used in commonly.

# High power simple type

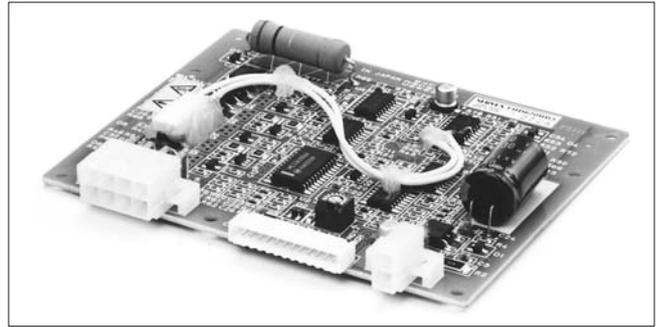


## ■Specification


Model on motor	Plain shaft type		FH6S20H-D3		FH6S40H-D3	
	Pinion shaft type		FH6PF20H-D3		FH6PE40H-D3	
Model on driver			FHD620HD3		FHD640HD3	
Rated voltage	V (DC)		24		24	
Rated output	W		20		40	
Speed control range	r/min		200~2500		200~2500	
Rated torque	mN · m		98		200	
	oz · in		14		28	
MAX. instantaneous torque (in 5sec.)	mN · m		150 (2000r/min MAX.)		290 (500r/min MAX.)	
	oz · in		21 (2000r/min MAX.)		42 (500r/min MAX.)	
Rated speed	r/min		2000		2000	
Speed setting method			① Speed setting by external speed setter (Sold separately: model code Q-R10KB)			
			② Speed setting by external voltage supply 0~10V			
Speed setting	(r/min)/V		300±5%			
Speed variation			Against load	±1%	0~rated torque at rated voltage and speed	
			Against voltage	±1%	Rated voltage ±10% at rated speed, no load	
			Against temperature	±3%	20±20°C at rated voltage and speed, no load	
Input and output signal		Input	RUN, BRAKE, F/R IN, ALARM RST H: Open collector L: GND (0~0.8V)			
		Output	ALARM, HU OUT, HV OUT Open collector output DC30V MAX. 10mA MAX.			
Speed pulse	Pulse/Revolution		7		7	
Current	Rated (Ave.)		1.8 MAX.		3.1 MAX.	
	MAX. (Peak)		7 MAX.		10 MAX.	
Protection functions			Over load protection When an exceeding torque than rated is applied to motor for more than about 5 sec., Stop motor and outputs "L" from "ALARM" (20W, 40W) "ALARM OUT". To release alarm: Input "L" in the ALARM RST or Turn off the power supply more than 1 min. period.			
Others			Operation temperature: 0~40°C (no condensation) continuous duty. The motor flange surface temp. must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength: Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance: 10MΩMIN. (20W, 40W) (Between case and coil by DC500V tester)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 200r/min	at 2000r/min	6H□EBN		8F□EBN	
			mN · m	oz · in	mN · m	oz · in
5	40	400	390	56	780	110
10	20	200	780	110	1600	220
25 (25.44)	8	80	1700	240	3600	510
50 (49.6)	4	40	3500	500	7000	990

- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.
- □: rotation of gear head output shaft becomes reverse direction of motors.
- In case of 8F□EBN value in ( ) should be used as gear ratio.

## Torque Speed/Current (TYP.) Characteristics FH6S(PF)20H-D3+FHD620HD3

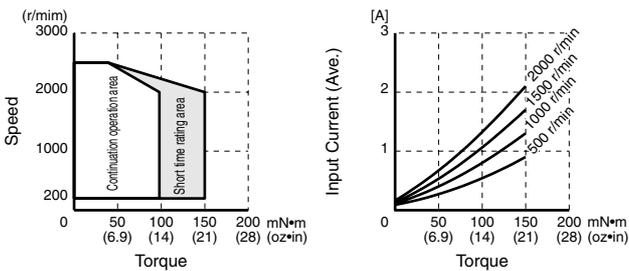


## FH6S(PE)40H-D3+FHD640HD3

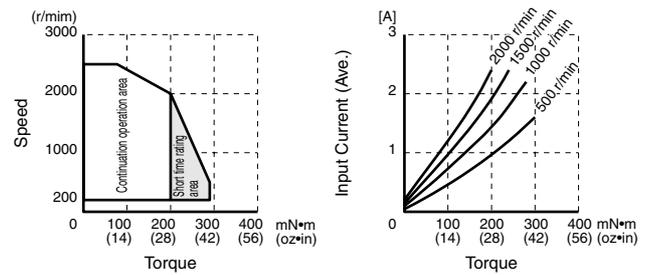

## Input & output terminals and wiring diagram



Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard · Condition	
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24 V ±10%	
	2	Black	P.GND	—	Power supply GND for driver		
I/O	1	Brown	HU OUT	Output	7 Pulse/Revolution ※1	H: Open collector DC30V MAX. L: 0~0.8 V, 10 mA MAX.	
	2	Red	HV OUT	Output			
	3	Orange	ALARM OUT	Output	H: Normal operation L: Alarm output		
	4	Yellow	VR	Output	Power supply positive for external speed setter		
	5	Green	VS	Input	Speed setting signal positive		0~10 V
	6	Blue	GND	—	Speed setting signal GND		
	7	Purple	GND	—	GND for I/O Signal		
	8	Gray	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)		H: Open collector L: 0~0.8 V
	9	White	BRAKE ※2	Input	H: BRAKE Deactivated L: BRAKE activated		
	10	Black	RUN	Input	H: Stop L: Start		
11	Brown	ALARM RST ※3	Input	H: Normal operation L: Reset			
	12	Red	N.C.	—	Not used	Must be operated in the open state.	

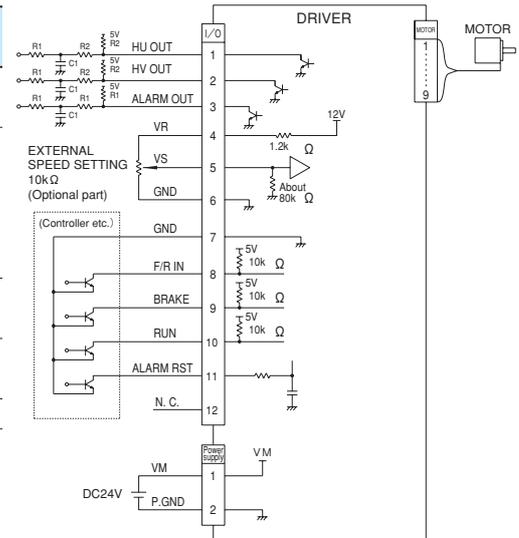

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

\*1 "HU OUT" signal and "HV OUT" signal are shown below.

Motor rotation (viewed from motor output shaft side)



T: Time (vary by its speed)

- ※ 2 • Brake specification: Short brake between terminals
- "BRAKE" has priority over "RUN".
- During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.


- ※ 3 In case of "L", the overload protection function is canceled. If overload operation is performed in this state, the motor may burn out.

## Protection

Protection function	Protection		Alarm Release
	Setting	Operation	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stepped and "ALARM" outputs "L"	Cool down the driver fully, and input "L" into "ALARM RST" until "ALARM OUT" changes to "H". Or disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use. When the overload protection function is canceled ("ALARM RST" is in the "L" state) and temperature rises rapidly due to motor restraint, the motor may burn out. Make sure to set "ALARM RST" to "H" before operating the motor.

## Control sequence

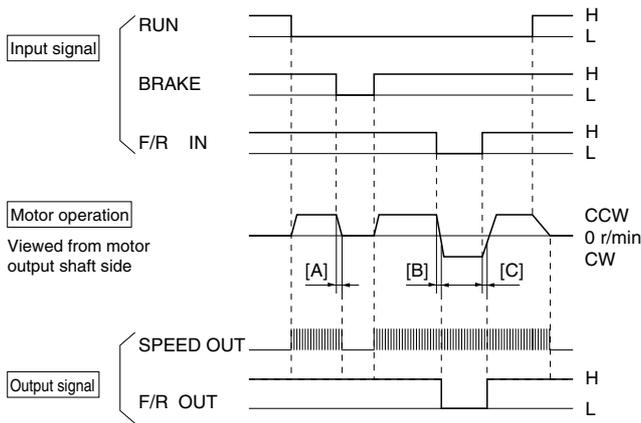

### [Notes for BRAKE Operation & Rotation change]

- Do not change (period [A] left) the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.
- During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same.
- When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H→L") must not be made.
- During the brake is operating, set the "RUN" signal at "L" all the time.

### WARNING:

In case of different way of use from (1), (2), (3) and (4), (1), (2), and (4) may be the cause of the incorrect operation and (3) may be the cause of the fire or the breakdown.

Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.

(Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)

[Notes on "F/R OUT"] (20,40W only)

During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0~5pulses of "SPEED OUT" from the motor rotation switched.

## Speed setting

Fig.1 Speed setting by external speed setter



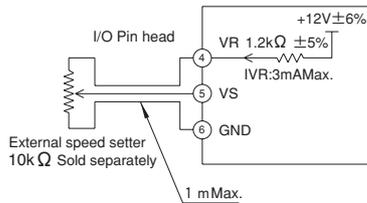



Fig.2 Speed setting by external voltage supply




Item	Setting Method
Speed setting by external speed setter (Optional Part)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as an external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By this function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

## Driver outline Unit: mm (inch)

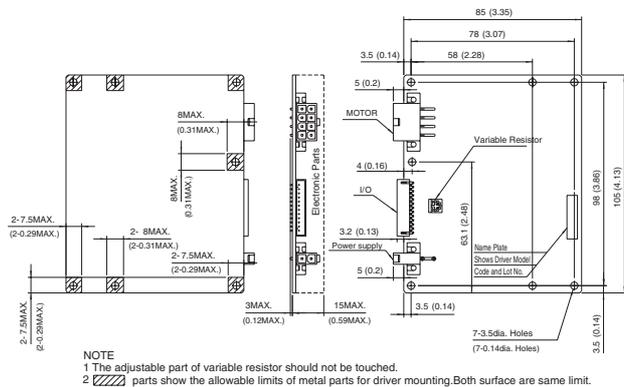

## Accessory Unit: mm (inch)

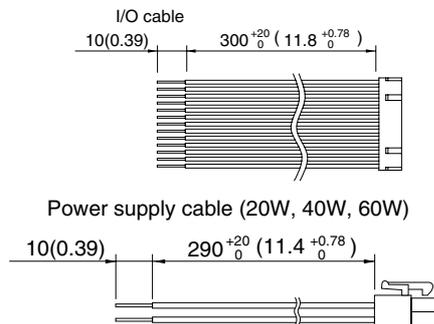

## Connector model code

Item	Pin head model code on drive	Connector model code on cable		Maker
		Housing	Contact (chained)	
I/O connection	53325-1210	51090-1200	50212-8000	MOLEX
Power supply connection	5566-02A	5557-02R	5556T	
Motor connection	5569-08A1	5557-08R	5556T	

# BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

In this series, motors and drivers are sold separately.  
Please indicate the model type of each product.

## FYD Series DC24V

### ■Distinguishing Features

- Motors are designed in flat shape and in light weight
  - A special magnetic circuit design was employed newly.  
By this design, these motors are in flat shape, and in lighter weight than conventional standard AC motors.
  - This series have 61mm sq. (2.4 in sq.), 80 mm sq.(3.1 in sq.), 90 mm sq. (3.5 in sq.) Flange sizes.
- Compact designed Driver
  - "Palm Mini PLUS" Type is the smallest. (for 6W - 40W)
  - "Simple" Type is a driver of components mounted on a PCB. (for 6W - 15W)
  - "High power Simple" Type Low-cost circuit-board type driver. (25W, 40W)
- Wide Ranged Speed Control
  - Wide range (200r/min - 2500r/min), stepless speed control.
  - "High power Simple" Type. (200r/min - 2000r/min)
  - Very steady characteristics (Feed back control employed).
- Speed pulse output
  - Speed pulse output can be used for speed monitoring, simplified position control...
  - "Palm Mini PLUS" Type: 30ppr
  - "Simple" "High power Simple" Type: 5ppr dual signal (120° phase difference)
- Direction of rotation signal output
  - Direction of rotation can be monitored by this signal. ("Simple" type needs an external circuit.)
- Alarming
  - At an over-load condition, the motor stops and an alarm signal is output.
- Gear Head
  - Low-cost gear head for FY series is also available.
- Rotor Cover (option) available  
An aluminum heat sink (size: 200mm x 200mm, thickness: 2mm or more) is required.



### ■Model Code

Model on motor

FY 8 PF 25 H - D3  
① ② ③ ④ ⑤ ⑥

- Series name
- Motor flange dimensions  
6: 61×61mm (2.4×2.4 in.)  
8: 80×80mm (3.1×3.1 in.)  
9: 90×90mm (3.5×3.5 in.)
- Motor output shaft type  
S: Plain shaft  
PF: Pinion shaft

- Motor output  
6: 6W  
15: 15W  
25: 25W  
40: 40W
- Driver type  
N: Normal  
H: High power simple type driver
- Power supply voltage  
D3: DC24V

Model on driver

FYD 8 25 H D3  
① ② ③ ④ ⑤

- Series name
- Adapting motor flange dimensions  
6: 61×61mm (2.4×2.4 in.)  
8: 80×80mm (3.1×3.1 in.)  
9: 90×90mm (3.5×3.5 in.)
- Motor output  
6: 6W  
15: 15W  
25: 25W  
40: 40W

- Driver type  
P: Palm mini PLUS type driver  
S: Simple type driver  
H: High power simple type driver
- Power supply voltage  
D3: DC24V

# Palm mini PLUS type



## ■Specification

Model on motor		Plain shaft type	FY6S6-D3	FY8S15-D3	FY8S25-D3	FY9S40-D3				
		Pinion shaft type	FY6PF6N-D3	FY8PF15N-D3	FY8PF25N-D3	FY9PF40N-D3				
Model on driver			FYD66PD3	FYD815PD3	FYD825PD3	FYD940PD3				
Rated voltage	V (DC)		24	24	24	24				
Rated output	W		6	15	25	40				
Speed control range	r/min		200~2500	200~2500	200~2300	200~2000				
Rated torque	mN · m		39	98	157	250				
	oz · in		5.6	14	22	36				
MAX. instantaneous torque 5sec	mN · m		59 (1500r/min MAX.)	150 (1500r/min MAX.)	200 (1500r/min MAX.)	300 (600r/min MAX.)				
	oz · in		8.3 (1500r/min MAX.)	21 (1500r/min MAX.)	28 (1500r/min MAX.)	43 (600r/min MAX.)				
Rated speed	r/min		1500	1500	1500	1500				
Speed setting method		①Speed setting by external speed setter (Sold separately: model code Q-R10KB) ②Speed setting by external voltage supply 0~10V								
Speed setting	(r/min)/V		300±5%							
Speed variation	Against load		±1%	0~rated torque at rated voltage and speed						
	Against voltage		±1%	DC24V±10% at rated speed, no load						
	Against temperature		±3%	20±20°C at rated voltage and speed, no load						
Input and output signal	Input	RUN, BRAKE, F/R IN H: Open collector L: GND (0~0.8V)								
	Output	ALARM, SPEED OUT (PULSE OUTPUT), F/R OUT Open collector output DC30V MAX. 10mA MAX.								
Speed pulse	Pulse/Revolution		30	30	30	30				
Current	Rated (Ave.)	A	0.7 MAX.	1.4 MAX.	2.3 MAX.	3.4 MAX.				
	MAX. (Peak)		4.2 MAX.	6.6 MAX.	10 MAX.	10 MAX.				
Protection functions		Over load protection When an exceeding torque than rated is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM".In disconnect power supply for more than 1min, In case of alarm release.								
Others		Operation temperature 0~40°C (no condensation) continuous duty. The motor flange surface temp must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester)								
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads							
	at 200r/min	at 1500r/min	6H□FBN-100		8H□FBN-100		8H□FBN-100		9H□FBN-100	
			mN · m	oz · in	mN · m	oz · in	mN · m	oz · in	mN · m	oz · in
5	40	300	160	22	390	56	640	83	1000	142
15	14	100	470	67	1200	170	1900	260	3100	431
25	8	60	720	100	1800	250	2800	400	4600	650
30	6.7	50	850	120	2100	290	3400	490	5600	793
50	4	30	1400	190	3100	440	5100	720	8300	1200


- □: rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

# BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS


# FYD Series DC24V

## ■ Torque-speed/Current (TYP.) characteristics


### (FY6S6-D3+FYD66PD3)

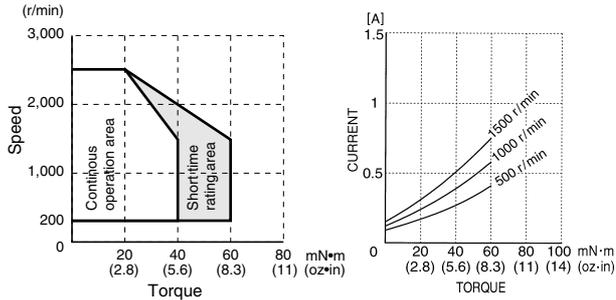


### (FY8S15-D3+FYD815PD3)

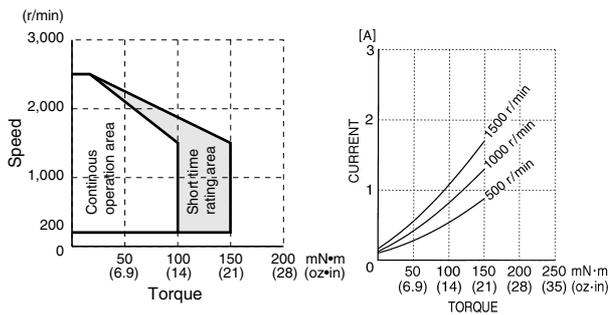

### (FY8S25-D3+FYD825PD3)

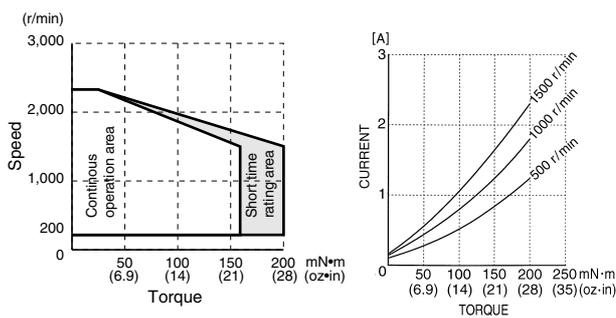


### (FY9S40-D3+FYD940PD3)

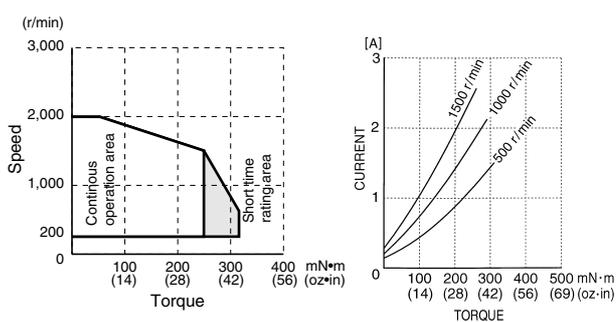


## ■ Motor outlines (Plain shaft type) Unit: mm (inch)


### FY6S6-D3

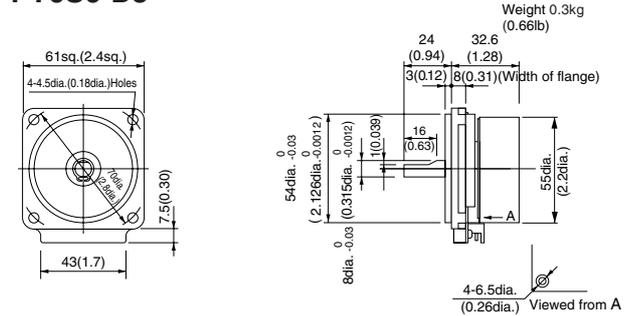


### FY8S15-D3

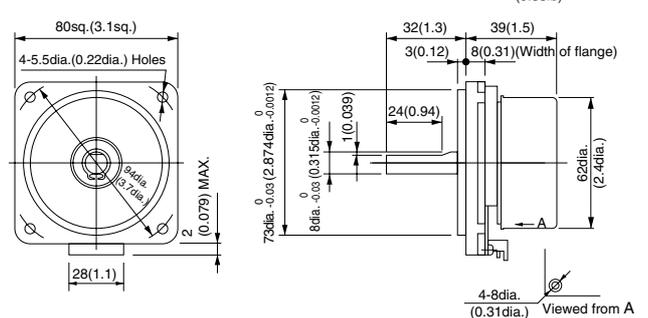

### FY8S25-D3

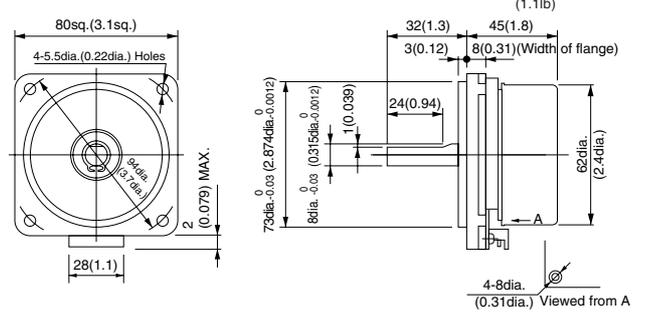



### FY9S40-D3

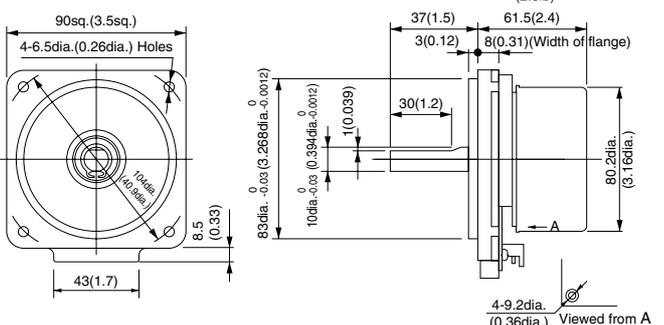

# Motor (Pinion shaft type) + Gear head outlines

Unit: mm (inch)



## FY6PF6N-D3+6H □ FBN-100

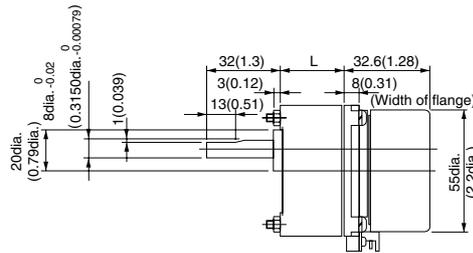

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	32(1.3)	0.4(0.88)	M4X50(2.0)
1/25~1/50	42(1.7)	0.4(0.88)	M4X60(2.4)



## FY8PF15N-D3+8H □ FBN-100

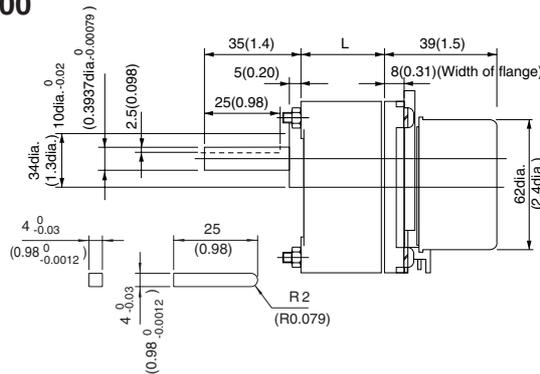

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)



## FY8PF25N-D3+8H □ FBN-100

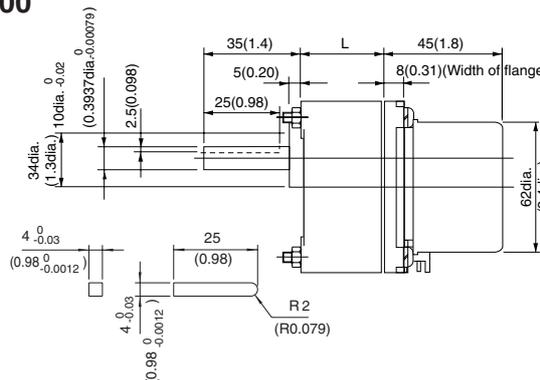

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

## FY9PF40N-D3+9H □ FBN-100

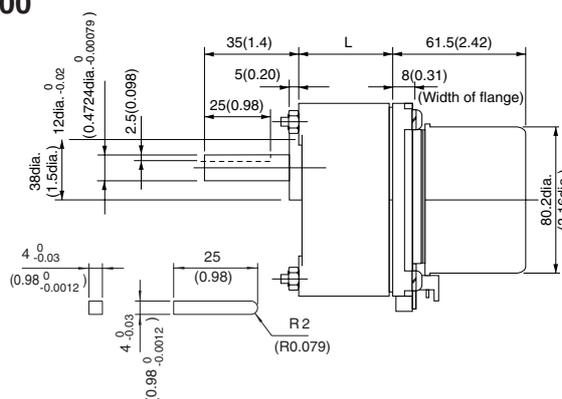

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	42(1.7)	0.8(1.8)	M6X50(2.4)
1/25~1/50	60(2.4)	0.9(2.0)	M6X60(3.1)

### NOTE

Rubber gaskets for insertion between gear head are sold separately to motor prevent oil leakage.

Model on rubber gasket


6H □ FBN: H6packing (rubber)

8H □ FBN: H8packing (rubber)


9H □ FBN: H9packing (rubber)

# Input & output terminals and wiring diagram

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition
Power supply	1	VM	Input	Power supply positive for driver	DC24V±10%
	2	P.GND	-	Power supply GND for driver	
I/O	1	SPEED OUT	Output	30 Pulse/Revolution *3	*1 H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	F/R OUT	Output	H: CCW L: CW (Viewed from motor output shaft side)	
	3	VR	Output	Power supply positive for external speed setter	0~10V
	4	VS	Input	Speed setting signal positive	
	5	GND	-	Speed setting signal GND	
	6	GND	-	GND for I/O Signal	
	7	ALARM OUT	Output	H: Normal operation L: Alarm output	Same as *1
	8	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	*2 H: Open collector L: 0~0.8V
	9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V During the operation of "BRAKE", "RUN" signal be "L".
	10	RUN	Input	H: Stop L: Start	Same as *2

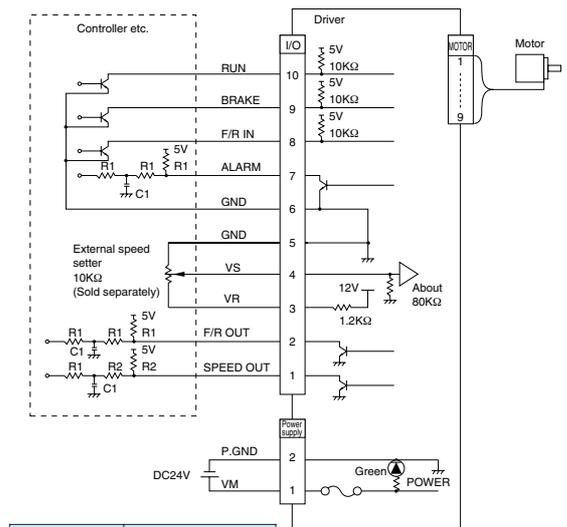


\*3 "SPEED OUT" signal is shown below.



When input signal is H, input signals (RUN, BRAKE, F/R IN) should be input by open collector. If 5V is input, it will become the cause of wrong operation. Noise of output signals (ALARM, F/R OUT, SPEED OUT) should be removed by a filter as shown in figure above. Setting of filter constant should be done by confirming the noise level referring to the recommended constant. At this time, be careful that signal delays if the values of resistance and/or capacitor are big though it becomes better to kill noise. Specially, for speed out, setting should be done with attention to filter constant because pulse width is narrow.

## Control sequence

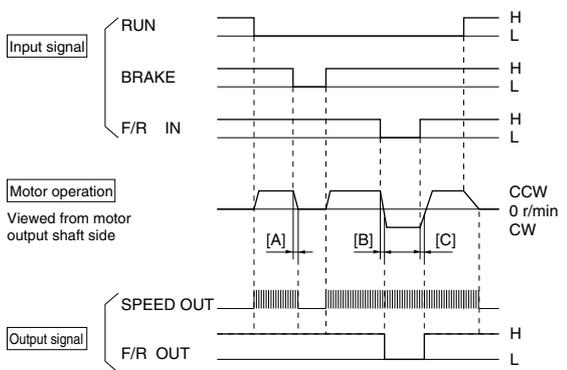

[Notes for BRAKE Operation & Rotation change]  
 (1) Do not change the "F/R IN" signal while the "BRAKE" is activated. "F/R IN" signal should be changed after "BRAKE" is deactivated.  
 (2) During the direction of rotation changing (period [B] & [C] left), you need the brake to operate, let it operate only when the both direction of rotation setting signal ("F/R IN") and direction monitor signal ("F/R OUT") is the same,  
 (3) When actual motor speed is higher than the setting (by signal input value of "VS"), any switching of the "F/R IN" and "BRAKE" ("H"→"L") must not be made.  
 (4) During the brake is operating set the "RUN" signal at "L" all the time.  
**WARNING:**  
 Notes above must be following without fail, and reminded all the time. But if not follow to (1), (2) & (4), it may cause abnormal/dangerous motor operation, and not follow to (3), it may cause FIRE or system damage.  
 Electrical shock: By the load condition, the terminal voltage (VM) is raised up to 30 VDC, during switching BRAKE and/or Rotation direction.  
 (Braking Operation: At higher speed: reverse rotation brake first, then short circuit brake. But at slower speed: short circuit brake only.)  
 [Notes on "F/R OUT"]  
 During the motor is in stop, the "F/R OUT" is held at the same signal as previously outputting. This means ; if the motor stopped once, but the rotation reversed by Cogging torque or by the Load, then the "F/R OUT" is held at reversed signal. Also note that "F/R OUT" signal will delay by 0~5pulses of "SPEED OUT" from the motor rotation switched.

## Speed setting

Fig.1 Speed setting by external speed setter



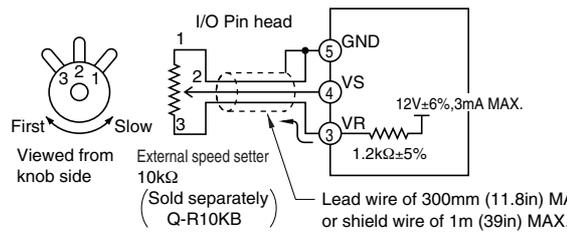


Fig.2 Speed setting by external voltage supply

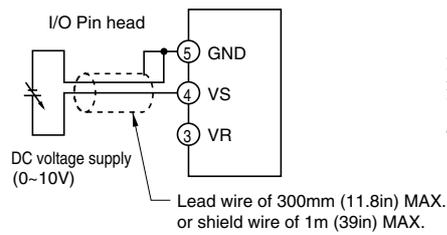

Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

## Protection


Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stopped, and "ALARM" outputs "L".	Disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.


## Driver outline

Unit: mm (inch)

**FYD66PD3, FYD815PD3,  
FYD825PD3, FYD940PD3**

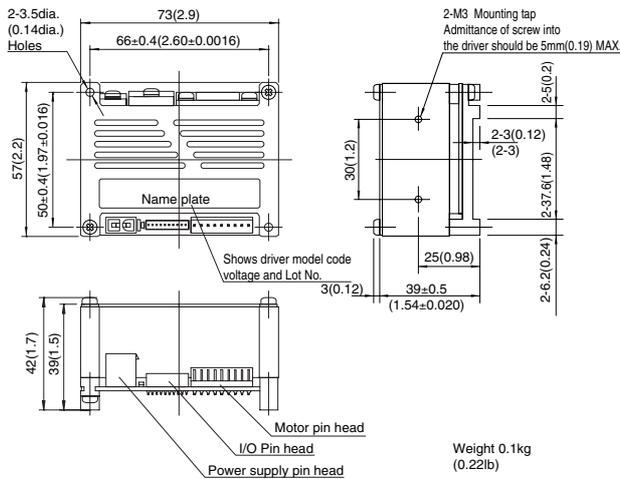


## Accessory Unit: mm (inch)

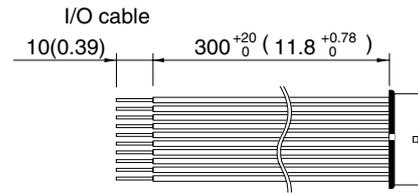

Connection guide

Pin No.	Name	Lead wire color	Lead wire
1	SPEED OUT	Brown	UL3265 AWG28
2	F/R OUT	Red	
3	VR	Orange	
4	VS	Yellow	
5	GND	Green	
6	GND	Blue	
7	ALARM	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	


Power supply cable



Connection guide


Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430
2	P. GND	Black	AWG22

## Rotor cover (Sold separately)

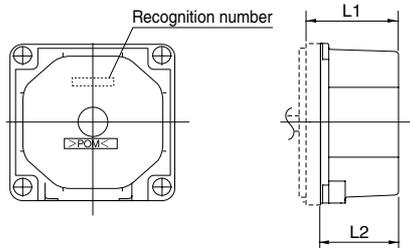

Model on rotor cover	L1mm (in)	L2mm (in)	Recognition number	Accessory washer nominal diameter	Adapting motor	
F-RC630	37 (1.5)	30.4 (1.20)	AD09877	M4	6W	Plain shaft type FY6S6-D3 Pinion shaft type FY6PF6N-D3
F-RC837	43.5 (1.71)	37 (1.5)	AD09768	M5	15W	Plain shaft type FY8S15-D3 Pinion shaft type FY8PF15N-D3
F-RC844	50 (2.0)	43.5 (1.71)	AD09904	M5	25W	Plain shaft type FY8S25-D3 Pinion shaft type FY8PF25N-D3
F-RC961	67.5 (2.66)	61 (2.40)	AD09903	M6	40W	Plain shaft type FY9S40-D3 Pinion shaft type FY9PF40N-D3

Motor cable

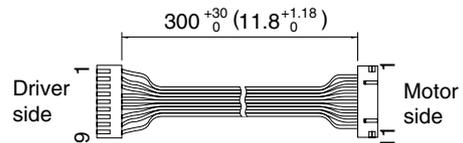

Connection guide

Motor side connector Pin No.	Driver side connector Pin No.	Name	Lead wire color	Lead wire
1	1	Coil U	Brown	UL1007 AWG24
2	-	-	-	-
3	2	Coil V	Red	UL1007 AWG24
4	-	-	-	-
5	3	Coil W	Orange	UL1007 AWG24
6	4	-	Yellow	
7	5	HW	Green	
8	6	HV	Blue	
9	7	HU	Purple	
10	8	GND	Gray	
11	9	12V	White	

## Connector model code


Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	IL-Y-10P-S15T2-EF	IL-Y-10S-S15C3	IL-Y-C3-A-10000	JAE
Power supply connection	Driver	5566-02A	5557-02R	5556T	MOLEX
Motor connection	Driver	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	

■Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

		Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
<b>FYD series</b>	<b>Palm mini PLUS driver</b>	FY6S6-D3	FYD66PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC630
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY6PF6N-D3	FYD66PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC630
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8S15-D3	FYD815PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC837
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8PF15N-D3	FYD815PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC837
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8S25-D3	FYD825PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY8PF25N-D3	FYD825PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC844
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY9S40-D3	FYD940PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	
		FY9PF40N-D3	FYD940PD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FED-CNPL03 300 (11.8)	F-RC961
				FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FED-CNPL05 500 (19.7)	
				FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FED-CNPL10 1000 (39.4)	

NOTE)Cable types for FYD series are the same as FED series, because they are used in commonly.

# Simple type

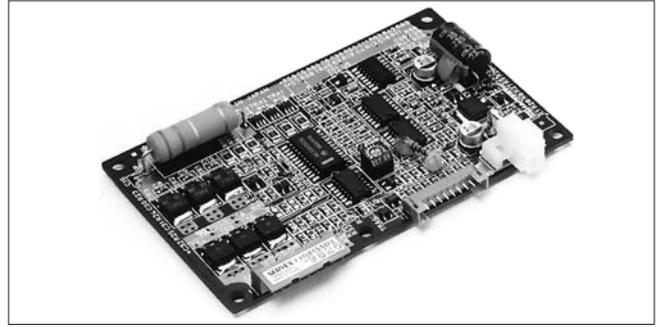

## ■Specification

Model on motor		Plain shaft type	FY6S6-D3		FY8S15-D3	
		Pinion shaft type	FY6PF6N-D3		FY8PF15N-D3	
Model on driver			FYD66SD3		FYD815SD3	
Rated voltage	V (DC)		24		24	
Rated output	W		6		15	
Speed range	r/min		200~2500		200~2500	
Rated torque	mN · m		39		98	
	oz · in		5.6		14	
Rated speed	r/min		1500		1500	
Speed setting method			① Speed setting by external speed setter (Sold separately: Model code Q-R10KB)			
			② Speed setting by external voltage supply 0~10V			
Speed setting	(r/min)/V		300±5%			
Speed variation	Against load		±1%	0~rated torque at rated voltage and speed		
	Against voltage		±1%	DC24V±10% at rated speed, no load		
	Against temperature		±3%	20±20°C at rated voltage and speed, no load		
Input and output signal	Input		RUN, BRAKE, F/R IN H: Open collector L: GND (0~0.8V)			
	Output		ALARM OUT, HU OUT, HV OUT Open collector output DC30V MAX. 10mA MAX.			
Speed pulse	Pulse/Revolution		5		5	
Current	Rated (Ave.)		0.7 MAX.		1.4 MAX.	
	MAX. (Peak)		2.8 MAX.		5 MAX.	
Protection functions			Over load protection When a load exceeding rated torque is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM" In case of alarm release, disconnect power supply for more than 1min.			
Others			Operation temperature 0~40°C (no condensation) continuous duty. The motor flange surface tempo must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz(Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester.)			
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 200r/min	at 1500r/min	6H□FBN-100		8H□FBN-100	
			mN · m	oz · In	mN · m	oz · In
5	40	300	160	22	390	56
15	14	100	470	67	1200	170
25	8	60	720	100	1800	250
30	6.7	50	850	120	2100	290
50	4	30	1400	190	3100	440


- □: rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

# BRUSHLESS DC MOTOR & SPEED CONTROL DRIVERS

# FYD Series DC24V


## Torque-speed/Current (TYP.) characteristics

### (FY6S6-D3+FYD66SD3)

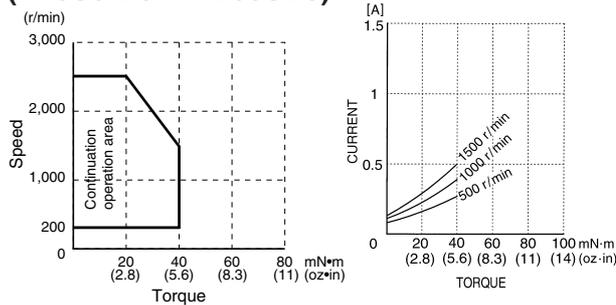


## Motor outlines (Plain shaft type)


### Unit: mm (inch) FY6S6-D3

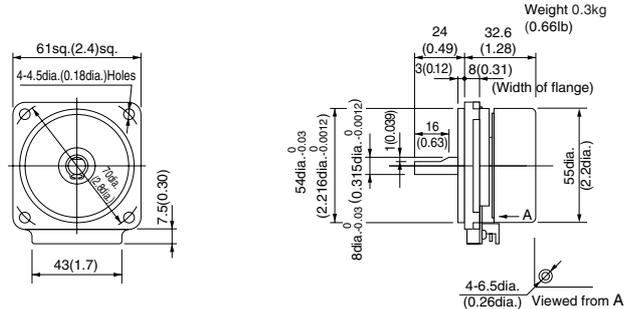

### (FY8S15-D3+FYD815SD3)

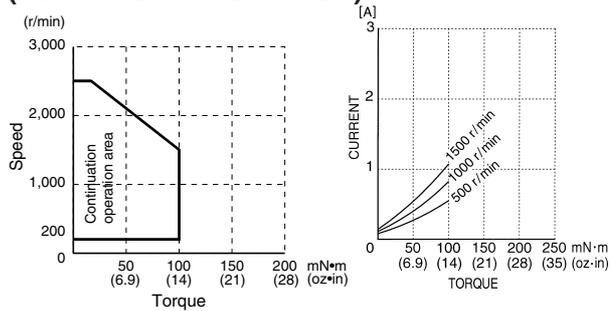


### FY8S15-D3

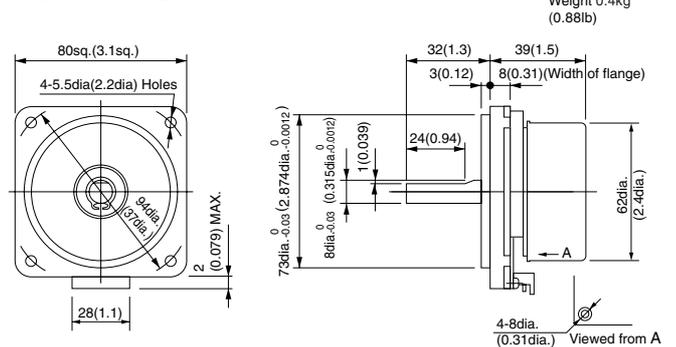

## Motor (Pinion shaft type) + gearhead outlines


### FY6PF6N-D3+6H □ FBN-100

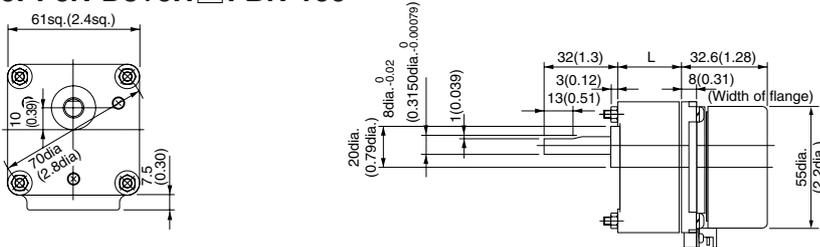

L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	L mm(In.)	Weight Kg(lb)	Screw
1/5~1/15	32(1.3)	0.4(0.88)	M4X50(2.0)
1/25~1/50	42(1.7)	0.4(0.88)	M4X60(2.4)

### FY8PF15N-D3+8H □ FBN-100

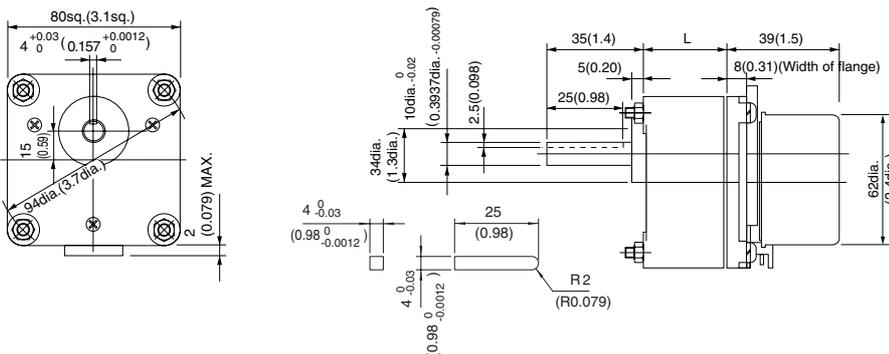


L(Gear head length)•Weight•Screw(Accessory)

Gear ratio	L mm(In.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

## Input & output terminals and wiring diagram

Item	Pin No.	Symbol	Input or Output	Function	Standard • Condition	
Power Supply	1	VM	Input	Power supply positive for drive	DC24V±10%	
	2	P.GND	—	Power supply GND for driver		
I/O	1	HU OUT	Output	5 pulse/revolution	H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.	
	2	HV OUT	Output	(Hall signal) *1		
	3	ALARM OUT	Output	H: Normal operation L: Alarm output		
	4	VR	Output	Power supply positive for external speed setter		
	5	VS	Input	Speed setting signal positive		0~10V
	6	GND	—	Speed setting signal GND		
	7	GND	—	GND for I/O signal		
	8	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)		
9	BRAKE	Input	H: BRAKE Deactivated L: BRAKE activated	H: Open collector L: 0~0.8V		
10	RUN	Input	H: Stop L: Start			

\*1 "HU OUT" signal and "HV OUT" signal are shown below.  
Motor rotation (viewed from motor output shaft side)

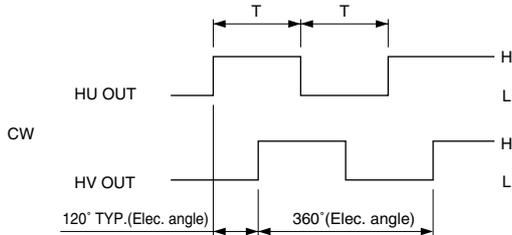

## Protection

Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stopped, and "ALARM" outputs "L".	Disconnect power supply for more than 1 minute.

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use.

## Speed setting

Fig.1 Speed setting by external speed setter



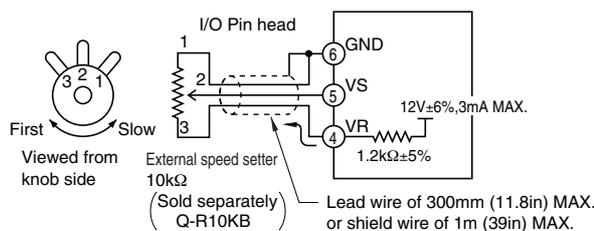


Fig.2 Speed setting by external voltage supply

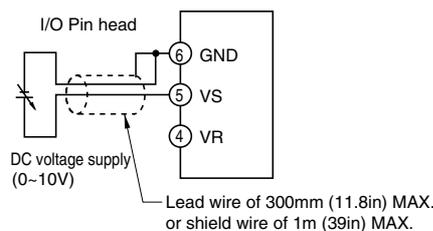

Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

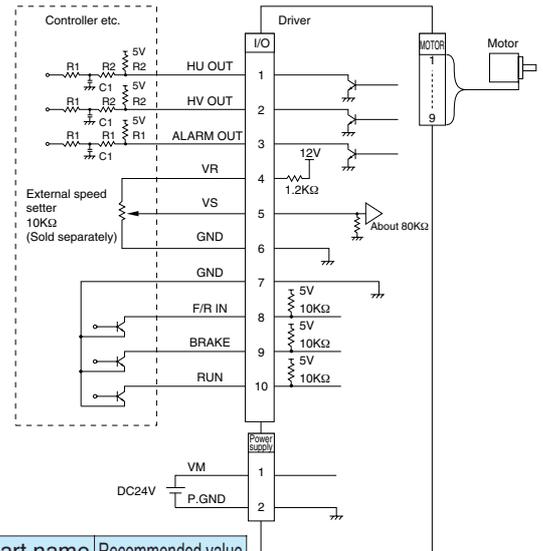

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

When input signal is H, input signals (RUN, BRAKE, F/R IN) should be input by open collector.

If 5V is input, it will become the cause of wrong operation.


Noise of output signals (ALARM OUT, HU OUT, HV OUT) should be removed by a filter as shown in fig.

Setting of filter constant should be done by confirming the noise level referring to the recommended constant.

At this time, be careful that signal delays if the values of resistance and/or capacitor are big though it becomes better to kill noise.


Specially, for HU OUT, HV OUT, setting should be done with attention to filter constant because pulse width is narrow.

## Control sequence

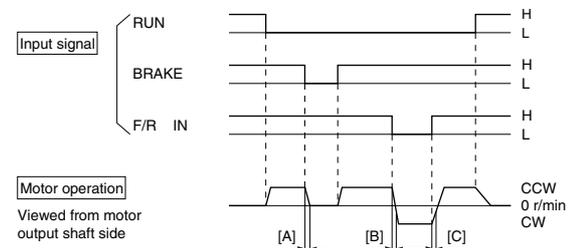


[Notes for "BRAKE" operation and during the rotation direction changing] "BRAKE" (Above [A] period) should be operated, within the "SPEED CONTROL RANGE".

If it is used differently from above, it may cause fire or failure. Also, be careful that "VM" terminal voltage happens to rise up to about 30V according to the condition of use during the rotation direction changing (Above [B] and [C] periods). (Brake operation: Short brake.)




**Driver outline** Unit: mm (inch)  
**FYD66SD3, FYD815SD3**

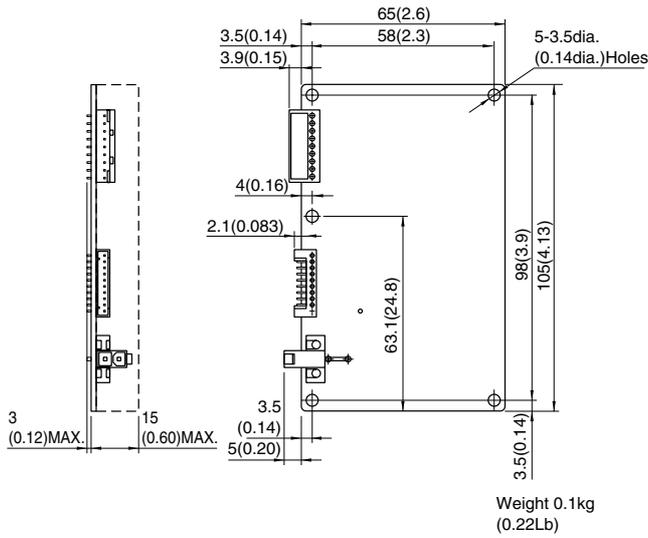

**Connection guide**

Pin No.	Name	Lead wire color	Lead wire
1	HU OUT	Brown	UL3265 AWG28
2	HV OUT	Red	
3	ALARM OUT	Orange	
4	VR	Yellow	
5	VS	Green	
6	GND	Blue	
7	GND	Purple	
8	F/R IN	Gray	
9	BRAKE	White	
10	RUN	Black	

**Accessory** Unit: mm (inch)

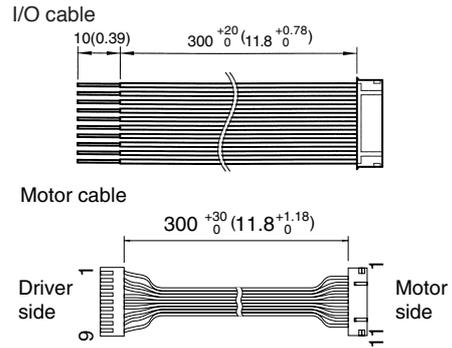

**Connection guide**

Motor side connector Pin No.	Driver side connector Pin No.	Name	Lead wire color	Lead wire
1	1	Coil U	Brown	UL1007 AWG24
2	-	-	-	-
3	2	Coil V	Red	UL1007 AWG24
4	-	-	-	-
5	3	Coil W	Orange	UL1007 AWG24
6	4	-	Yellow	
7	5	HW	Green	
8	6	HV	Blue	
9	7	HU	Purple	
10	8	GND	Gray	
11	9	12V	White	

**Connection guide**

Pin No.	Name	Lead wire color	Lead wire
1	VM	Red	UL1430
2	P. GND	Black	AWG22

**Connector model code**


Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	IL-S-10P-S2L2-EF	IL-S-10S-S2C2-S	IL-S-C2-S-10000	JAE
Power supply connection	Driver	5566-02A1	5557-02R	5556T	MOLEX
Motor connection	Driver	IL-G-9P-S3T2-SA	IL-G-9S-S3C2-SA	IL-G-C2-SC-10000	JAE
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	

**Motor/Driver/Cable/Rotor cover model code table** Unit: mm (inch)

	Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
<b>FYD series</b> <b>Simple driver</b>	FY6S6-D3	FYD66SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC630
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY6PF6N-D3	FYD66SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC630
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY8S15-D3	FYD815SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC837
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	
	FY8PF15N-D3	FYD815SD3	FED-CNSL03 300 (11.8)	FED-CNML03 300 (11.8)	FYD-CNBL03 300 (11.8)	F-RC837
			FED-CNSL05 500 (19.7)	FED-CNML05 500 (19.7)	FYD-CNBL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FED-CNML10 1000 (39.4)	FYD-CNBL10 1000 (39.4)	

NOTE) The power supply cable and motor cable types for FY series are the same as those for FED series.

# High power simple

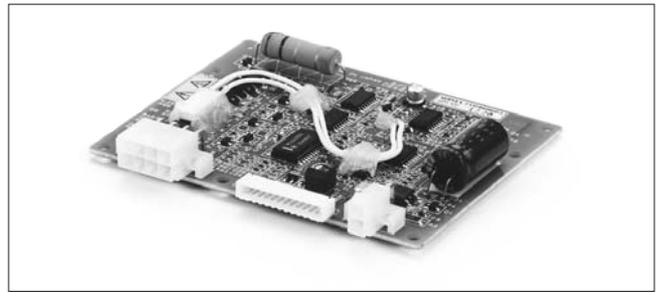


## ■Specification


Model on motor		plain shaft type	FY8S25H-D3		FY9S40H-D3	
		Pinion shaft type	FY8PF25H-D3		FY9PF40H-D3	
Model on driver		FYD825HD3			FYD940HD3	
Rated voltage	V (DC)	24			24	
Rated output	W	25			40	
Speed control range	r/min	200~2300			200~2000	
Rated torque	mN · m	157			250	
	oz · in	22			36	
MAX. instantaneous torque 5sec	mN · m	200 (1500r/min MAX.)			300 (600r/min MAX.)	
	oz · in	28 (1500r/min MAX.)			43 (600r/min MAX.)	
Rated speed	r/min	1500			1500	
Speed setting method		① Speed setting by external speed setter (Sold separately: model code Q-R10KB)				
		② Speed setting by external voltage supply 0~10V				
Speed setting	(r/min)/V	300±5%				
Speed variation	Against load	±1%	0~rated torque at rated voltage and speed			
	Against voltage	±1%	DC24V±10% at rated speed, no load			
	Against temperature	±3%	20±20°C at rated voltage and speed, no load			
Input and output signal	Input	RUN, BRAKE, F/R IN, ALARM RST H: Open collector L: GND (0~0.8V)				
	Output	ALARM, HU OUT HV OUT Open collector output DC30V MAX. 10mA MAX.				
Speed pulse	Pulse/Revolution	5			5	
Current	Rated (Ave.)	2.3 MAX.			3.4 MAX.	
	MAX. (Peak)	10 MAX.			10 MAX.	
Protection functions		Over load protection When an exceeding torque than rated is applied to motor for more than about 5sec. Stop motor and output "L" from "ALARM".				
Others		Operation temperature 0~40°C (no condensation) continuous duty. The motor flange surface temp must be 80°C MAX. (Ambient temperature 40°C without heat sink) Motor dielectric strength Withstand for 1min. under AC500V 50Hz (Between case and coil) Motor insulation resistance 10MΩMIN. (Between case and coil DC500V tester)				
Gear ratio	Speed (r/min)		Applicable MAX. Torque for gearheads			
	at 200r/min	at 1500r/min	8H □ FBN-100		9H □ FBN-100	
			mN · m	oz · in	mN · m	oz · in
5	40	300	640	83	1000	140
15	14	100	1900	260	3100	440
25	8	60	2800	400	4600	650
30	6.7	50	3400	490	5600	790
50	4	30	5100	720	8300	1200

- □: rotation of gear head output shaft becomes reverse direction of motors.
- Although the rotation speed range in the high-speed area expands more than that shown in the above table, the allowable torque may decrease. Refer to the torque rotation speed graph.

## Torque-speed/Current (TYP.) characteristics (FY8S25H-D3/FY8PF25H-D3+FYD825HD3)

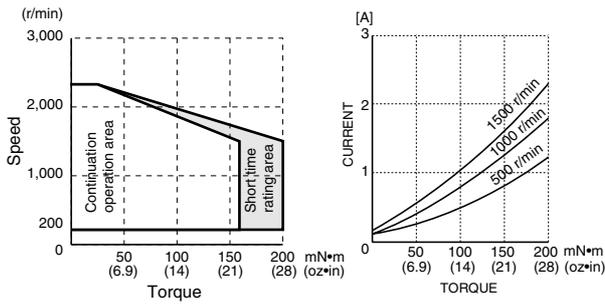


## Feature (FY9S40H-D3/FY9PF40H-D3+FYD940HD3)

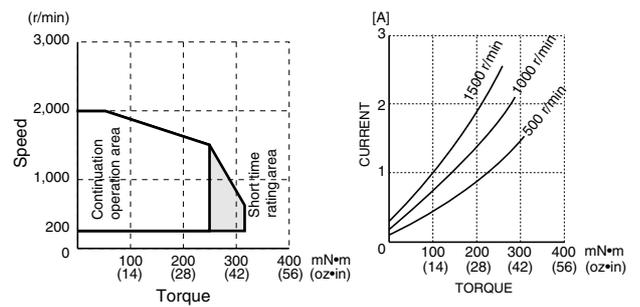


## Motor outlines (Plain shaft type) Unit: mm (inch)

### FY8S25H-D3

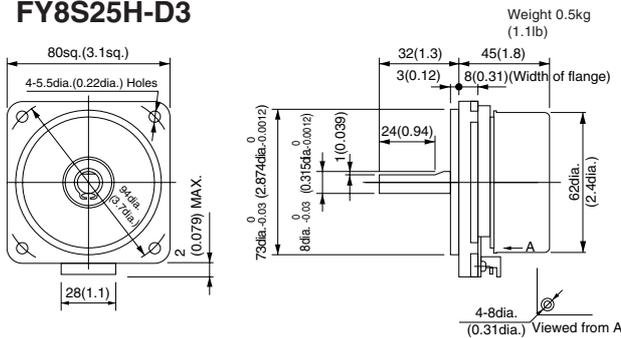


### FY9S40H-D3

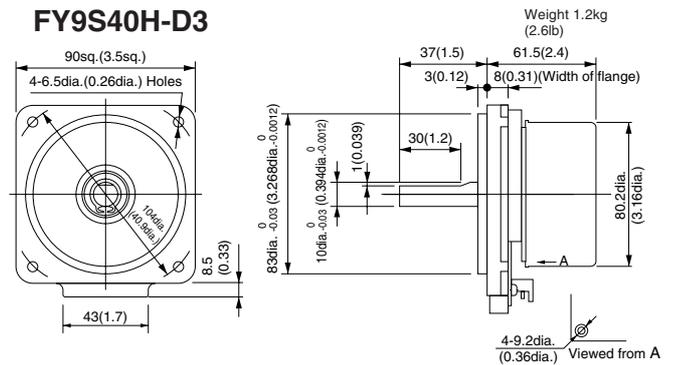

## Motor (Pinion shaft type) + Gear head outlines Unit: mm (inch)

### FY8PF25H-D3+8H □ FBN-100

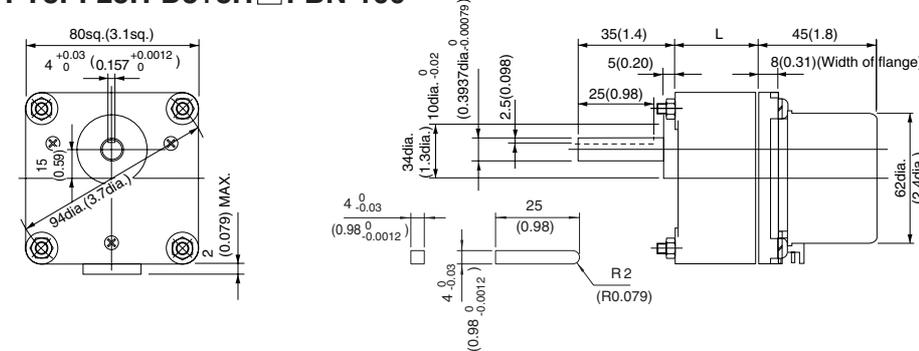

L (Gear head length) • Weight • Screw (Accessory)


Gear ratio	Lmm(in.)	Weight Kg(lb)	Screw
1/5~1/15	30(1.2)	0.5(1.1)	M5X50(2)
1/25~1/50	40(1.6)	0.6(1.3)	M5X60(2.4)

### NOTE

Rubber gaskets for insertion between gear head are sold separately to motor prevent oil leakage.

Model on rubber gasket  
8H □ FBN: H8packing (rubber)  
9H □ FBN: H9packing (rubber)


## Rotor cover (Sold separately)

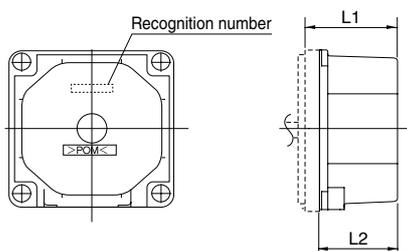

Model on rotor cover	L1mm (in)	L2mm (in)	Recognition number	Accessory washer nominal diameter	Adapting motor
F-RC844	50 (2.0)	43.5 (1.71)	AD09904	M5	25W Plain shaft type FY8S25H-D3
					Pinion shaft type FY8PF25H-D3
F-RC961	67.5 (2.66)	61 (2.40)	AD09903	M6	40W Plain shaft type FY9S40H-D3
					Pinion shaft type FY9PF40H-D3

## Input & output terminals and wiring diagram



Item	Pin No.	Read Wire Color	Symbol	Input or Output	Function	Standard · Condition
Power supply	1	Red	VM	Input	Power supply positive for driver	DC24V±10%
	2	Black	P.GND	—	Power supply GND for driver	
I/O	1	Brown	HU OUT	Output	5 Pulse/Revolution ※1	H: Open collector DC30V MAX. L: 0~0.8V 10mA MAX.
	2	Red	HV OUT	Output		
	3	Orange	ALARM OUT	Output	H: Normal operation L: Alarm output	
	4	Yellow	VR	Output	Power supply positive for external speed setter	
	5	Green	VS	Input	Speed setting signal positive	0~10V
	6	Blue	GND	—	Speed setting signal GND	
	7	Purple	GND	—	GND for I/O Signal	
	8	Gray	F/R IN	Input	H: CCW L: CW (Viewed from motor output shaft side)	H: Open collector L: 0~0.8V
	9	White	BRAKE ※2	Input	H: BRAKE Deactivated L: BRAKE activated	
	10	Black	RUN	Input	H: Stop L: Start	
11	Brown	ALARM RST ※3	Input	H: Normal operation L: Reset		
	12	Red	N.C.	—	Not Connected	Must be operated in the open state.

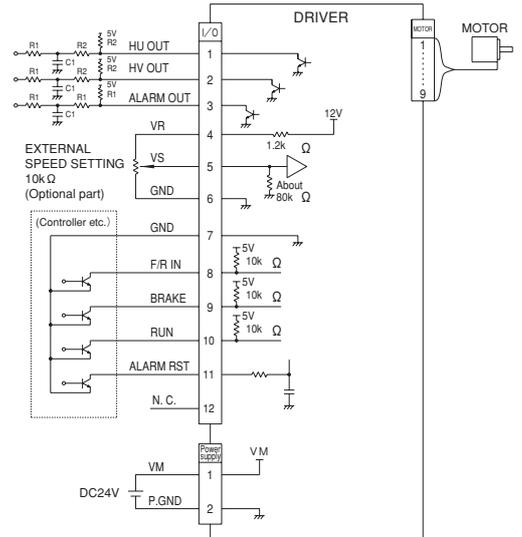

Part name	Recommended value
R1	4.7KΩ
R2	1KΩ
C1	0.01μF

※1 "HU OUT" signal and "HV OUT" signal aer shown below.


Motor rotation (viewed from motor output shaft side)



- ※2 • Brake specification: Short brake between terminals
- "BRAKE" has priority over "RUN".
- During rotation direction switching operation, "BRAKE" terminal voltage may reduce due to internal processing.

※3 In case of "L", the overload protection function is canceled. If overload operation is performed in this state, the motor may burn out.

## Control sequence

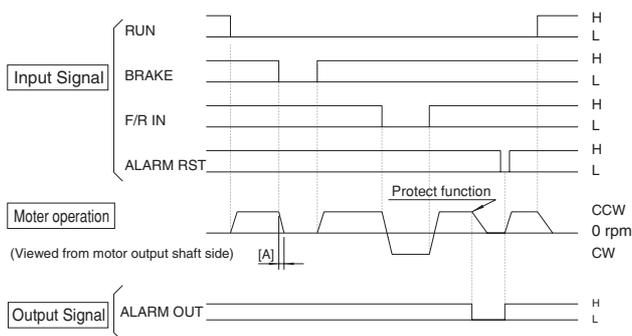

[Note for brake operation]  
Perform brake operation (area [A] above) within the speed limit range.  
Different operation from the above may cause fire or failure.

## Speed setting

Item	Setting Method
Speed setting by external speed setter (sold separately)	Connect as shown in Fig.1 and set by external speed setter. Use variable resistor 10[KΩ] as external speed setter.
Speed setting by external voltage supply	Connect as shown in Fig.2 and set speed by external voltage supply.

By these function, it is possible to set a speed at outside of Speed control range. But it must be out of our product warranty.

## Protection

Protection function	Protection		Alarm Release
	Setting	Action	
Overload Protection	When the load exceeds the rated torque for more than 5 seconds, the driver will cause the motor to stop and "ALARM" will output "L".	Motor is stopped, and "ALARM" outputs "L".	Cool down the driver fully, and disconnect power supply for more than 1 minute until "ALARM OUT" changes to "H".

Do not use this function to determine whether or not the load exceeds the rated torque. Please make sure to check the load is lower than the rated torque before use. When the overload protection function is canceled ("ALARM RST" is in the "L" state) and temperature rises rapidly due to motor restraint, the motor may burn out. Make sure to set "ALARM RST" to "H" before operating the motor.

Fig.1 Speed setting by external speed setter







Fig.2 Speed setting by external voltage supply




## ■Driver outline Unit: mm (inch)

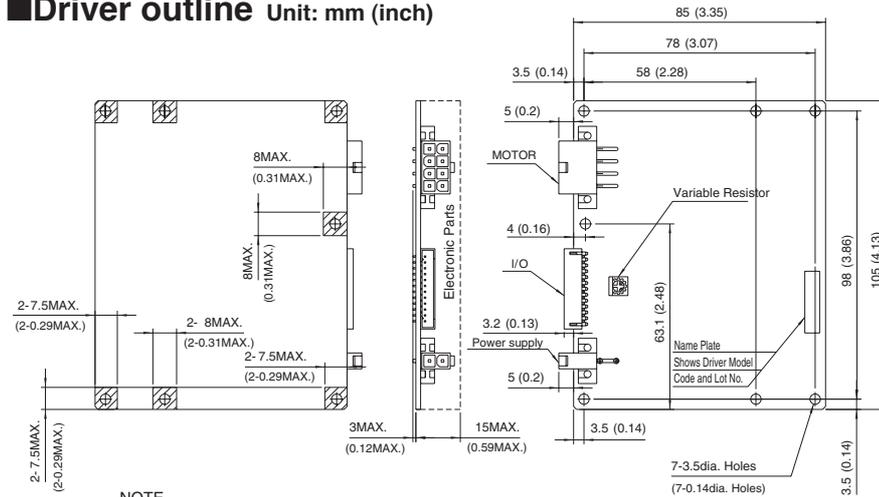

### NOTE

- 1 The adjustable part of variable resistor should not be touched.
- 2 parts show the allowable limits of metal parts for driver mounting. Both surface are same limit.

## ■Accessory Unit: mm (inch)

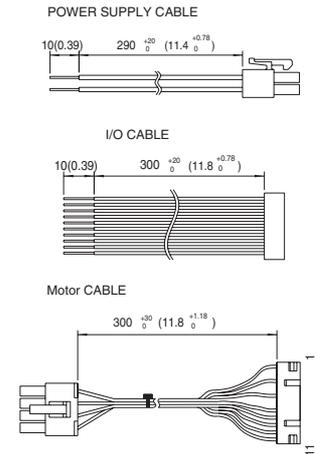

### Connection guide (Motor side)

Pin No.	Name	Note
1	Coil U	—
2	—	—
3	Coil V	—
4	—	—
5	Coil W	—
6	—	—
7	HW	Open collector output
8	HV	Open collector output
9	HU	Open collector output
10	GND	—
11	12V	—

### Connection guide (Driver side)

Pin No.	Name	Lead wire color	Note
1	GND	Gray	—
2	VH(12V)	White	—
3	Coil U	Brown	—
4	Coil V	Red	—
5	HU	Purple	Open collector output
6	HV	Blue	Open collector output
7	HW	Green	Open collector output
8	Coil W	Orange	—

## ■Connector model code

Item	Driver or motor side	Pin head model code on driver or motor	Connector model code on cable		Maker
			Housing	Contact (reel)	
I/O connection	Driver	53325-1210	51090-1200	50212-8000	MOLEX
Power supply connection	Driver	5569-02A1	5557-02R	5556T	
Motor connection	Driver	5569-08A1	5557-08R	5556T2	
	Motor	IL-G-11P-S3L2-SA	IL-G-11S-S3C2-SA	IL-G-C2-SC-10000	JAE

## ■Motor/Driver/Cable/Rotor cover model code table Unit: mm (inch)

	Motor model code	Driver model code	Power supply cable model code	Motor cable model code	I/O Cable model code	Rotor cover model code
FYD series High power Simple driver	FY8S25H-D3	FYD825D3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC844
			FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
	FY8PF25H-D3	FYD825D3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC844
			FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
	FY9S40H-D3	FYD940HD3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC961
			FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	
	FY9PF40H-D3	FYD940HD3	FED-CNSL03 300 (11.8)	FYD-CNDL03 300 (11.8)	FYD-CNHL03 300 (11.8)	F-RC961
			FED-CNSL05 500 (19.7)	FYD-CNDL05 500 (19.7)	FYD-CNHL05 500 (19.7)	
			FED-CNSL10 1000 (39.4)	FYD-CNDL10 1000 (39.4)	FYD-CNHL10 1000 (39.4)	

NOTE) Power Supply Cable types for FYD series are the same as FED series, because they are used in commonly.

A *Nidec* Group Company

**SERVO**

All for dreams

[www.nidec-servo.com](http://www.nidec-servo.com)

**NIDEC SERVO CORPORATION  
INTERNATIONAL SALES OFFICE**

Osaki MT Building 2F, 5-9-11  
Kita-Shinagawa, Shinagawa-ku, Tokyo, 141-0001  
Tel: +81-(0)3-6756-5304 Fax: +81-(0)3-6702-0507

**NIDEC SERVO AMERICA CORPORATION**

2050 Center Ave. Suite 318  
Fort Lee, NJ 07024  
Tel: +1-(0) 201-585-0720  
Fax: +1-(0) 201-585-0670

**NIDEC SERVO EUROPE B.V.**

PO Box 1099, 3840 BB Harderwijk  
The Netherlands  
Tel: +31-(0) 3414-27575  
Fax: +31-(0) 3414-23388

PO Box 7084, Hook, Hampshire, RG27 9XL, UK

Tel: +44-(0) 1256-767712  
Fax: +44-(0) 1256-767715

**NIDEC SERVO CORPORATION  
SINGAPORE BRANCH**

No. 50, Kallang Avenue #05-01,  
Noel Corporate Buildings, Singapore 339505  
Tel: +65-(0) 6743-7655  
Fax: +65-(0) 6842-7839

**NIDEC SERVO (HONG KONG) CO., LIMITED**

Unit 1008-09, Saxon Tower, 7 Cheung Shun Street,  
Lai Chi Kok, Kowloon, HONG KONG  
Tel: +852-(0) 2314-0037  
Fax: +852-(0) 2314-4768

**NIDEC SERVO (HONG KONG) CO., LIMITED**

**TAIWAN REPRESENTATIVE OFFICE**

Rm.1001, No.88, Sec.2,  
Chung Shan N.Rd., Taipei 104 Taiwan  
Nidec Taiwan Corporation.  
FAX +852-(0) 3007-8924

**WARNING**

- Please do not exceed the specifications noted in this catalogue, otherwise there is a chance of electric shock, injury, or other damage.
- Any modifications made to this motor are beyond the limits of our guarantee. NIDEC SERVO cannot take responsibility for any customer modifications.
- Please ensure that a thorough evaluation has been done before using this motor in medical equipment or other devices related to human lives.
- Please ensure that a thorough evaluation has been done before using this motor in applications that have a serious effect on the public.

**NOTE**

- Figures in this catalogue are average measured values. Please request the product delivery specification when preparing a purchase specification.
- The dimensions, specifications, and components contained in this catalogue are subject to change without prior notice due to further product improvements.